



ACL45-0003 Type number: 1071878

Three-phase Line Reactor

Design	Three-phase, iron-core with air gaps, PolyGap(R) core design
Impregnation	Complete unit vacuum-overpressure impregnated with varnish acc. to temperature class H and temperature hardened in furnace

Technical Data

No. of phases		3
Rated voltage	Un/V	400
Rated frequency	fn/Hz	50 / 60
Max operation voltage	Umax/V	690
Impedance		5 % @400V, 50Hz or @480V, 60Hz
Rated inductivity	Ln/mH	3 x 13
RMS current	Irms/A	3
Total losses	Nvsum/W	20
Mass /kg	m/kg	3.2

Operating conditions

Protection class	IP00, Indoor operation	
Type of cooling	AN	natural convection
Isolation class	T50/H	
Minimum ambient temperature	Tamin/°C	5 no condensing, no ice
Maximum ambient temperature	Tamax/°C	50

Standards

IEC standards	IEC/EN60076-6 VDE0532-76-6	
UL approval	UL file E173113 class H	
CE mark	Yes	
Seperate source voltage	UAC/kV (1 min)	3.6

Mechanical characteristics

Winding material Cu/Al	Cu
Terminal 1	screw clamp terminal block TSCB 4 / 0,5-4mm ² / 0,5Nm
Terminal 2	screw clamp terminal block TSCB 4 / 0,5-4mm ² / 0,5Nm
Ground connect.	safety class I
Bandage	Klebeband G 565 UL ID 1042646

Warnungen Cautions



Nichtbeachtung dieser Hinweise kann zu schweren Verletzungen bis hin zum Tode sowie zur Zerstörung dieses oder angeschlossener Produkte führen!

Im Betrieb können die Produkte hohe Spannungen aufweisen. Berühren Sie die Produkte nicht und schützen Sie die Produkte gegen Berührung.

Stellen Sie vor Installations- oder Wartungsarbeiten sicher, dass die Produkte spannungsfrei geschaltet sind und keine Restspannungen mehr aufweisen.

Betreiben Sie keine Produkte, die beschädigt sind. Die Installation darf nur von fachlich geschultem Personal durchgeführt werden.

Die angegebenen technischen Daten sind typisch. Aufgrund von Material- und Fertigungseigenschaften können Abweichungen auftreten.

Änderungen vorbehalten.



Noncompliance with these instructions may lead to serious injury, death, or damage to the products and connected equipment.

All electrically active parts may carry high voltages. Do not touch the products during operation and protect the products against accidental contact.

Before any assembly or maintenance make sure that all equipment is disconnected from the power source and is free of residual voltage.

Do not install products in case of any visible damage. Installation must be done by skilled personnel only.

All given technical specification are typical. Material and production tolerances may cause variations. This datasheet may be subject to change.

Data sheet

ACL45-0003 Type number: 1071878




Reactor Technology at Its Best


MANGOLDT



Name Plate

zeichnungen/tschild/pdf/AK1071878.JPG

MANGOLDT				Hans von Mangoldt GmbH 52080 Aachen, Germany	
LINE REACTOR - ACL45-0003					
TYP	1071878	Nr	{999999999}	IEC60076	
LN/mH	13	UN/V	400/480	IP00	
Irms/A	3	fN/Hz	50/60	{9999}	
uk/%	5	ED/%	100	3,2 kg AN-T50/H	
Made in Germany					

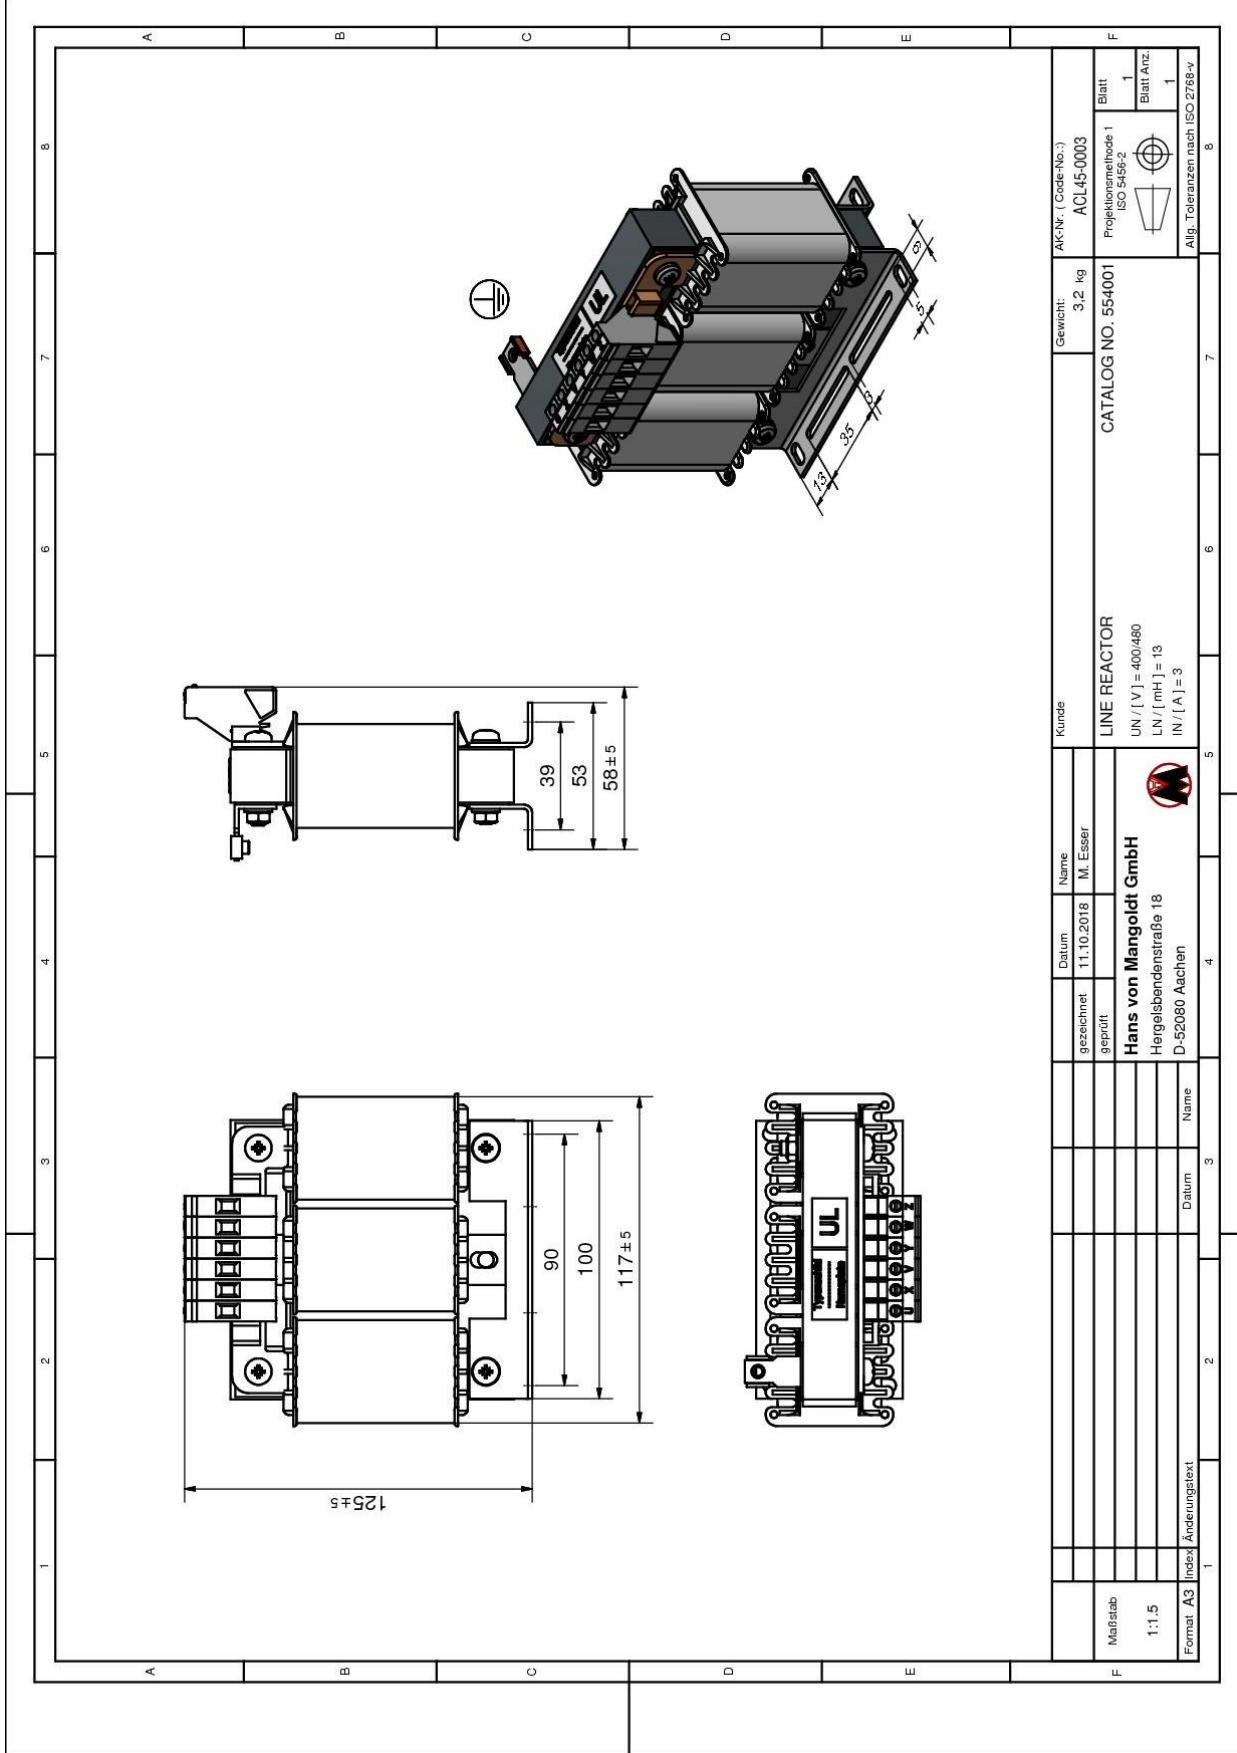

AK-Nr. (Code-No.):	ACL45-0003	Gewicht:	3,2 kg	Kunde	LINE REACTOR
Projektionsmethode	ISO 5456:2	CATALOG NO.	554001	gezeichnet	1.1.10.2018
Blatt	1	Name	M. Esser	geprüft	
Blatt Anz.	1	Hans von Mangoldt GmbH	Hergelsbendenstraße 18	Datum	1.1.10.2018
Projektionsmethode		D-52080 Aachen		geprüft	
Allg. Toleranzen nach	ISO 2768-v			Datum	
UN / [V] =	400/480			Name	
LN / [mH] =	13			Datum	
IN / [A] =	3			Name	
Maßstab	1:1.5			Datum	
Format	A3			Name	
Index	Änderungstext			Datum	