


ACL45-0429 Type number: 1064238

Three-phase Line Reactor

Design	Three-phase, iron-core with air gaps, PolyGap(R) core design
Impregnation	Complete unit vacuum-overpressure impregnated with varnish acc. to temperature class H and temperature hardened in furnace

Technical Data

No. of phases		3
Rated voltage	Un/V	400
Rated frequency	fn/Hz	50 / 60
Max operation voltage	Umax/V	690
Impedance		5 % @400V, 50Hz or @480V, 60Hz
Rated inductivity	Ln/mH	3 x 0.092
RMS current	Irms/A	429
Total losses	Nvsum/W	570
Mass /kg	m/kg	75

Operating conditions

Protection class	IP00, Indoor operation	
Type of cooling	AN	natural convection
Isolation class	T50/H	
Minimum ambient temperature	Tamin/°C	5 no condensing, no ice
Maximum ambient temperature	Tamax/°C	50

Standards

IEC standards	IEC/EN60076-6 VDE0532-76-6	
UL approval	UL file E173113 class H	
CE mark	Yes	
Seperate source voltage	UAC/kV (1 min)	3.6

Mechanical characteristics

Winding material Cu/Al	Al
Terminal 1	Cu bar 40 x 5 mm ² / 14mm
Terminal 2	Cu bar 40 x 5 mm ² / 14mm
Ground connect.	safety class I

Warnungen



Nichtbeachtung dieser Hinweise kann zu schweren Verletzungen bis hin zum Tode sowie zur Zerstörung dieses oder angeschlossener Produkte führen!

Im Betrieb können die Produkte hohe Spannungen aufweisen. Berühren Sie die Produkte nicht und schützen Sie die Produkte gegen Berührung.

Stellen Sie vor Installations- oder Wartungsarbeiten sicher, dass die Produkte spannungsfrei geschaltet sind und keine Restspannungen mehr aufweisen.

Betreiben Sie keine Produkte, die beschädigt sind. Die Installation darf nur von fachlich geschultem Personal durchgeführt werden.

Die angegebenen technischen Daten sind typisch. Aufgrund von Material- und Fertigungseigenschaften können Abweichungen auftreten. Änderungen vorbehalten.

Cautions



Noncompliance with these instructions may lead to serious injury, death, or damage to the products and connected equipment.

All electrically active parts may carry high voltages. Do not touch the products during operation and protect the products against accidental contact.

Before any assembly or maintenance make sure that all equipment is disconnected from the power source and is free of residual voltage.

Do not install products in case of any visible damage. Installation must be done by skilled personnel only.

All given technical specification are typical. Material and production tolerances may cause variations. This datasheet may be subject to change.

Data sheet

ACL45-0429 Type number: 1064238




Reactor Technology at Its Best

MANGOLDT



Name Plate

zeichnungen/tschild/pdf/AK1064238.JPG

MANGOLDT 		Hans von Mangoldt GmbH 52080 Aachen, Germany	
LINE REACTOR - ACL45-0429			
TYP	1064238	Nr {999999999}	IEC60076
LN/ μ H	92	UN/V 400/480	IP00
I _{rms} /A	429	fN/Hz 50/60	{9999}
uk/%	5	ED/% 100	75,1 kg AN-T50/H
Made in Germany			

Data sheet

ACL45-0429 Type number: 1064238




Reactor Technology at Its Best

MANGOLDT



Approved drawing

zeichnungen/end/ACL/ACL45-0429.JPG

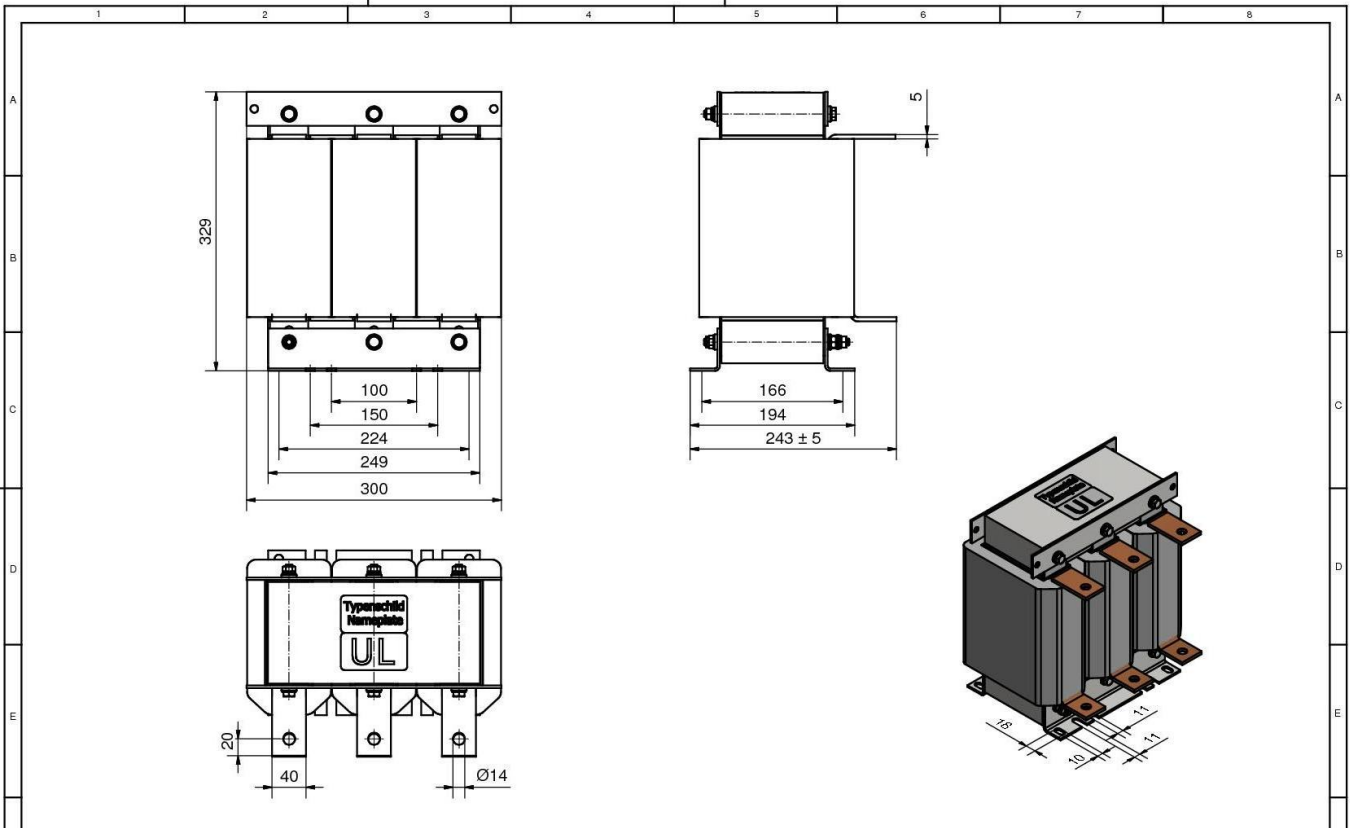

Format A3		Index		Änderungstext		Datum		Name		Kunde		Gewicht: 75.1 kg		AK-Nr. (Code-No.): ACL45-0429	
Maßstab 1:4						gezeichnet 15.03.2018		Name M. Esser		LINE REACTOR 3UI150/120LL		Catalog No.554039		Blatt 1	
						geprüft		Hans von Mangoldt GmbH		LN [mH] 0,092				Blatt Anz 1	
								Hergelsbendenstraße 18		UN [V] 400				Projektionsmethode 1	
								D-52080 Aachen		I rms [A] 429				ISO 5456-2	
														Allg. Toleranzen nach ISO 2768-v	