



See V1K Installation Guide For Terminal Wire Size And Torque Information.

Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

Suggested Customer Entrance (Bottom Entry)

Suggested Customer Entrance (Either Side)

(0.38-16, Ground Stud.)

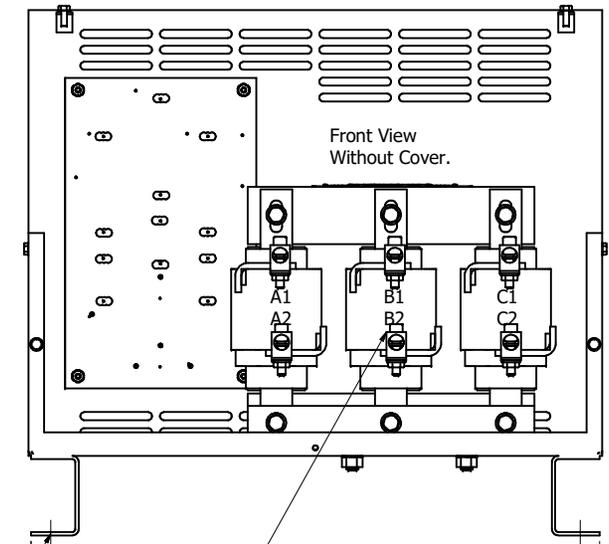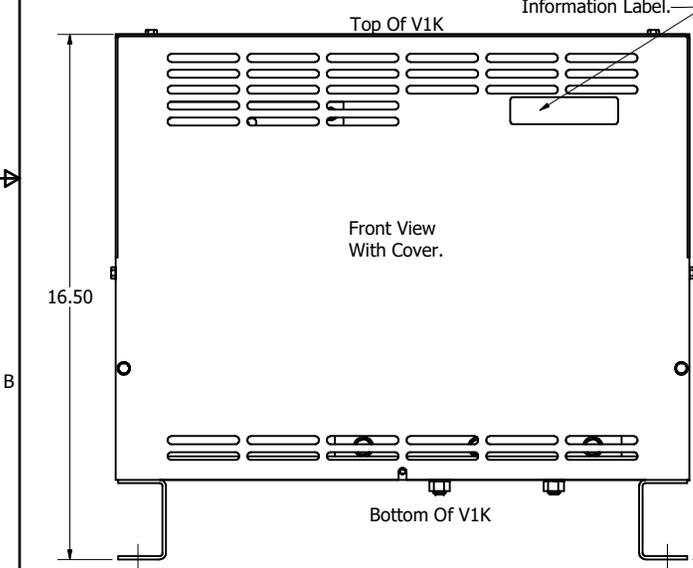



0.41 Dia Mounting Holes 4 Places.

0.62

(Customer Connections) Markings On Coil For Reference Only.

V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K130A01*	600	130	3	83
V1K130A01EX*	600	130	3	83

* = (Blank) - No Thermal Switch
* = T - Thermal Switch Option

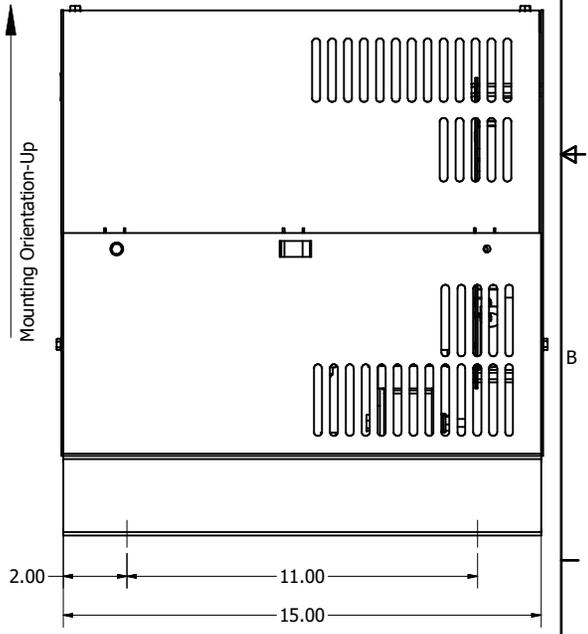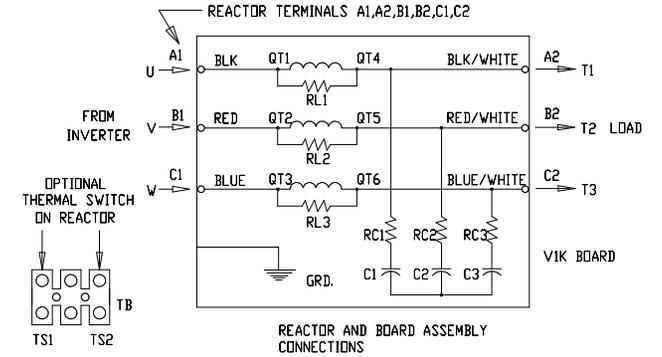

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10				 W132N10611 (Rev 13 Feb 2023) Germantown, WI 53022 © 2023 TCI, LLC	
G	6391, Iductor Updated	8/25/2023	DSW	FRACTIONAL ± 1/32				An <i>Original Motion Company</i> V1K, Enclosed 130 Amps	
F	4658 Rated To Max Voltage	08/28/20	JRN	ANGULAR ± 1°				DRN BY: DSW DATE: 4/26/17 SCALE: TO FIT REV: 102408DG FILE:	
E	4030, Combine, Update V1K Drawings	6/23/17	DSW	NO				SHEET 2 OF 2	
NO	REVISION	DATE	BY						