


V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K160A01*	600	160	3	83
V1K160A01EX*	600	160	3	83

* = (Blank) - No Thermal Switch
 * = T - Thermal Switch Option

See V1K Installation Guide For Terminal Wire Size And Torque Information.
 Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

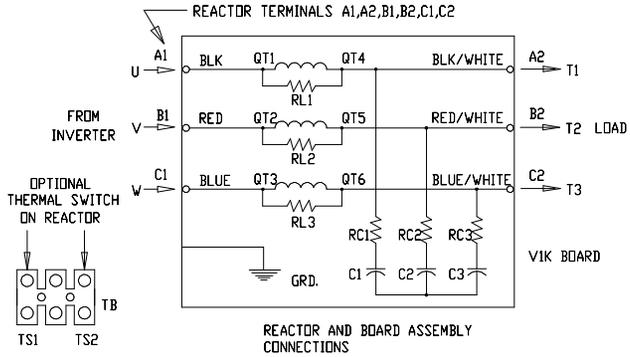

Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 <small>W132N10611 (Rev 1) 15Feb Germantown, WI 53022</small>	
				DECIMAL	.XX ± .25		
					.XXX ± .10		
1	5908 Add T/S Option, Schematic Update	04/06/22	JRN	FRACTIONAL			
H	4658 Rated To Max Voltage	03/04/19	JRN	ANGULAR	± 1/32		
G	4030, Combine, Update V1K Drawings	6/23/17	DSW				
NO	REVISION	DATE	BY		± 1°		

DRN BY: DSW DATE: 4/26/17
 SCALE: TO FIT DRWN BY: DSW
 VIK, Enclosed, Type 1
 160 Amps
 102409DG
 SHEET 1 OF 1