
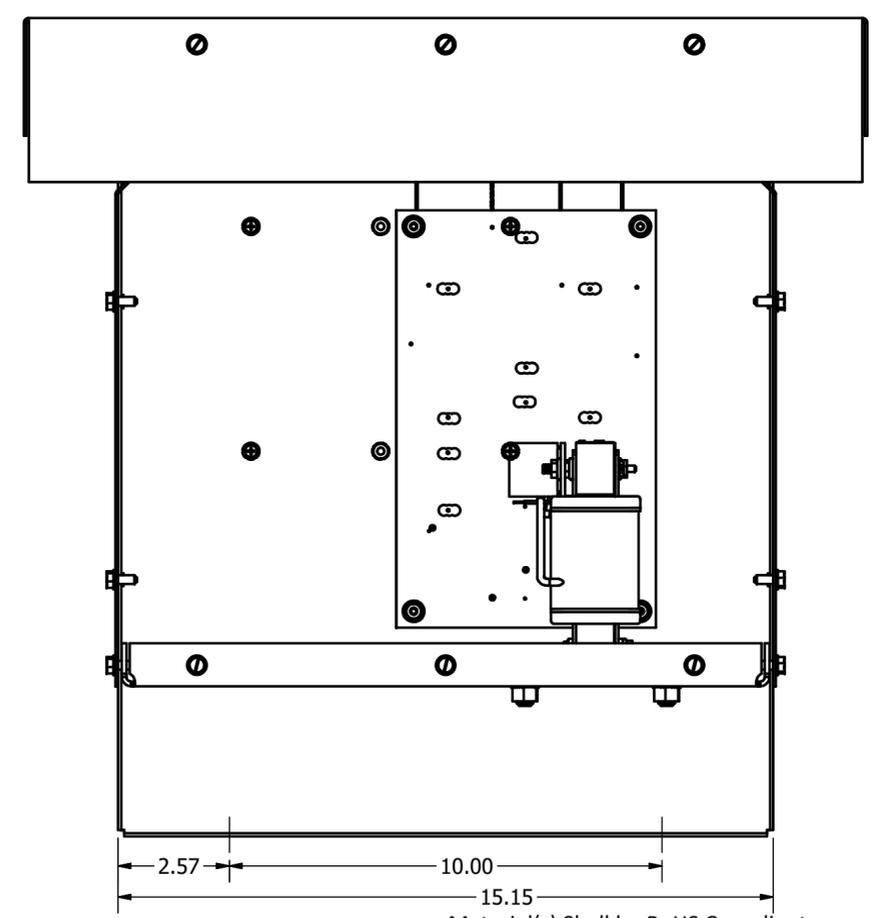
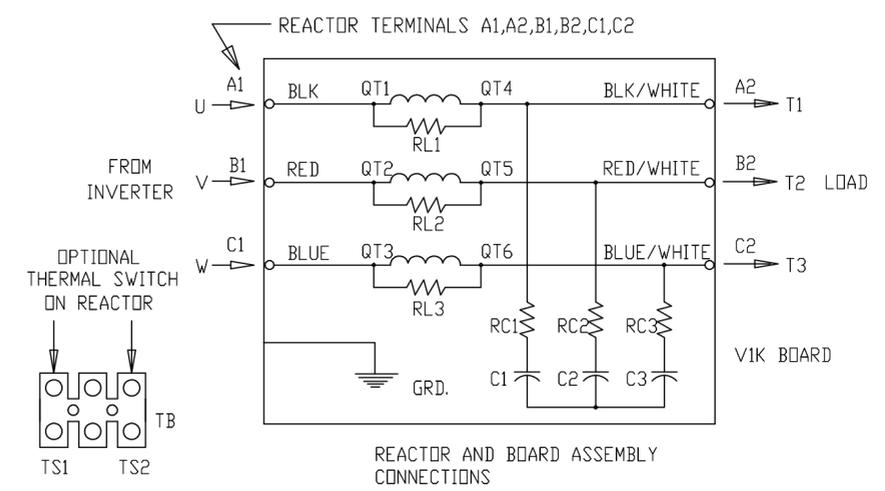


See V1K Installation Guide For Terminal Wire Size And Torque Information.
 Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.

V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K35A03*	600	35	3	56
V1K35A03EX*	600	35	3	56
V1K45A03*	600	45	3	56
V1K45A03EX*	600	45	3	56
V1K55A03*	600	55	3	56
V1K55A03EX*	600	55	3	56

* = (Blank) - No Thermal Switch
 * = T - Thermal Switch Option

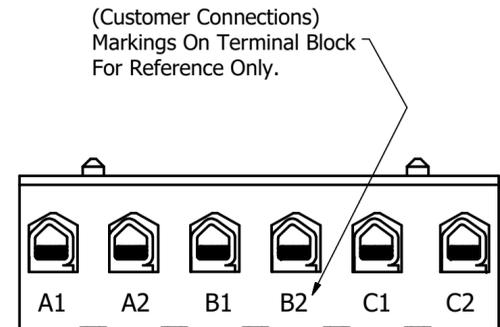

Material(s) Shall be RoHS Compliant

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
 NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		W132 N10611 Grant Drive Germantown, WI 53022	
B	4658 Rated To Max Voltage	03/04/19	JRN	FRACTIONAL ± 1/16		V1K, TYPE 3R 35 Amps to 55 Amps	
A	4030 VIK DRAWING UPDATE	6/23/17	DSW	ANGULAR ± 1°		DRN BY DSW DATE 4/26/17 SCALE TO FIT APRVD: 104226DG SIZE C SHT. 1 OF 1	
NO	REVISION	DATE	BY				