
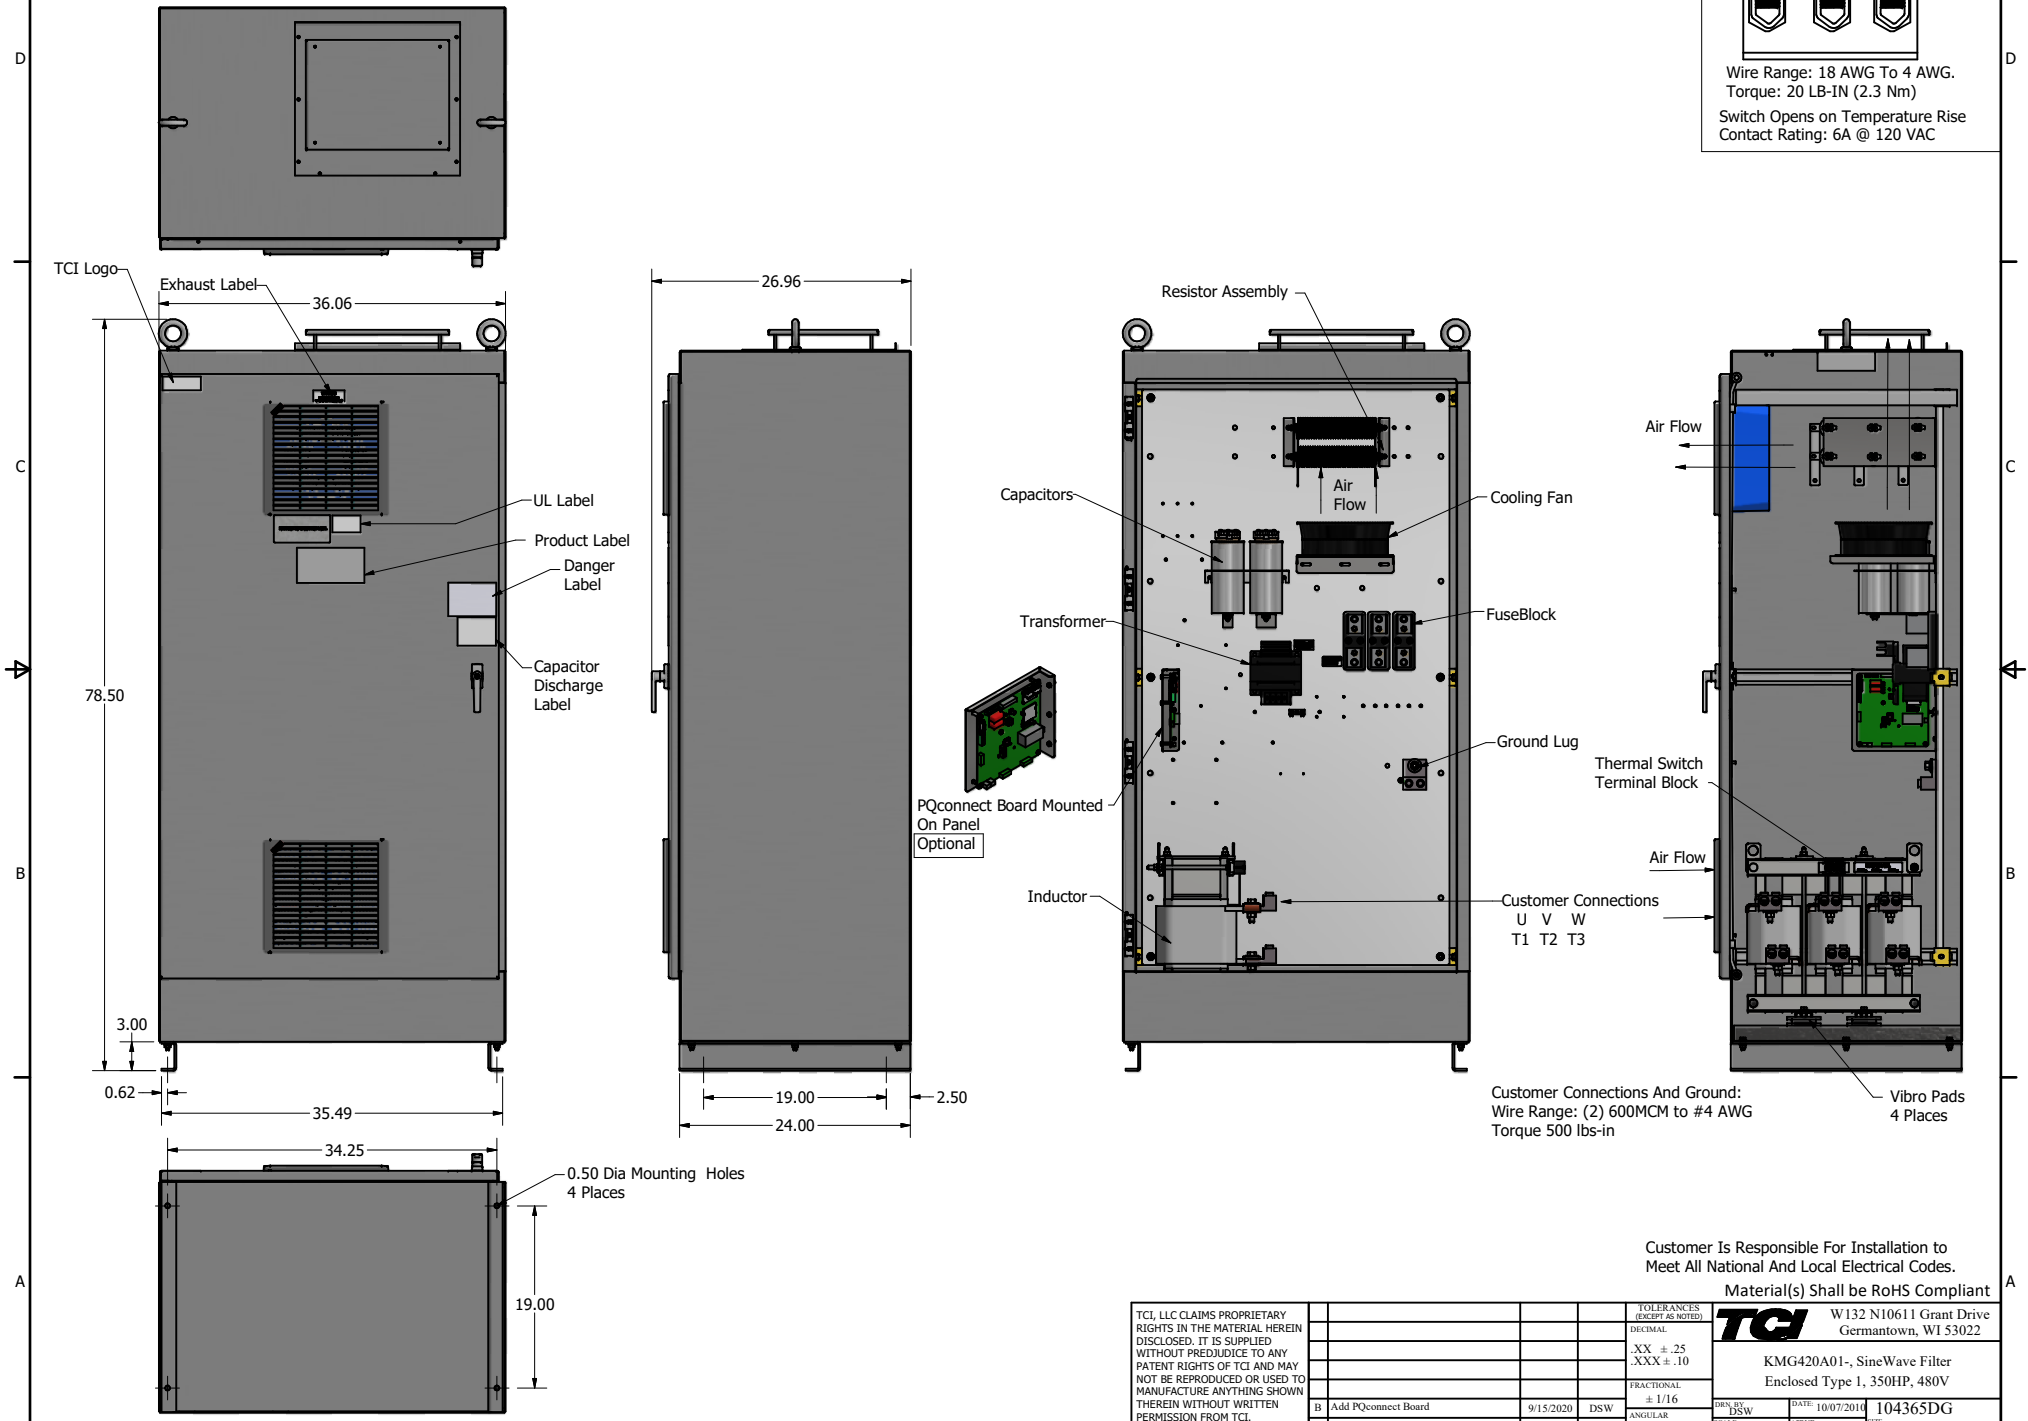


SineWave Part Number	Schematic Drawing#	Approx Weight (LBS)
KMG420A01A	24281-3A	915
KMG420A01P	24281-3P	920

HorsePower (HP)	kVar	Max Amps	Voltage (V)	HZ	Phase
350	30	420	480	60	3



Customer Connections And Ground:
Wire Range: (2) 600MCM to #4 AWG
Torque 500 lbs-in

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED)	TCI W132 N10611 Grant Drive Germantown, WI 53022 KMG420A01- SineWave Filter Enclosed Type 1, 350HP, 480V DWN BY: DSW DATE: 10/07/2014 104365DG SCALE: 1/5.5 DRAWN: CSE SHEET 1 OF 1
					DECIMAL	
					.XX ±.25 .XXX ±.10	
					FRACTIONAL	
B	Add PQconnect Board	9/15/2020	DSW		ANGULAR ± 1/16	
NO	REVISION	DATE	BY		± 1°	