
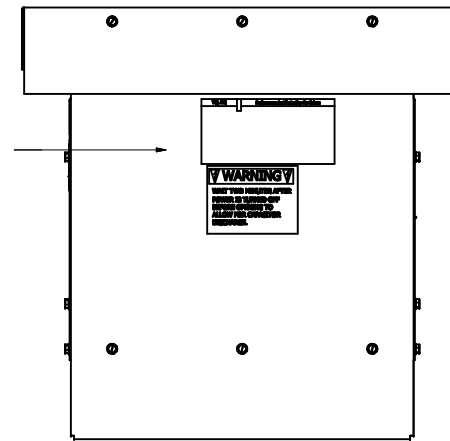


SUGGESTED
CUSTOMER
ENTRANCE.

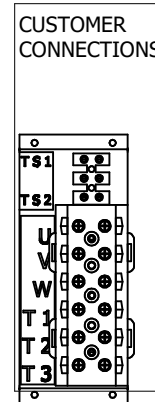

NOTE: FOR WIRE RANGE AND
TORQUE INFORMATION
SEE IOM MANUAL.

MSD PART NUMBER	HP	VOLTAGE	CURRENT	WEIGHT	TERMINAL BLOCK	GROUND LUG
MSD0022B300	7.5	240V	22 AMPS	90LBS	WIRE RANGE: 1-22AWG	WIRE RANGE: 1/0 -14AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

THE INFORMATION AND DESIGNS CONTAINED
IN THIS DRAWING ARE CONFIDENTIAL AND THE
PROPRIETARY PROPERTY OF ALLIED MOTION
TECHNOLOGIES INC. AND ITS SUBSIDIARIES.
NEITHER THIS DESIGN NOR ANY INFORMATION
CONTAINED IN THIS DRAWING MAY BE
REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT THE EXPRESS WRITTEN CONSENT OF
ALLIED MOTION TECHNOLOGIES INC. AND ITS
SUBSIDIARIES.

NO	REVISION	DATE	BY	ANGULAR	TOLERANCES (EXCEPT AS NOTED)
				± 1°	DECIMAL .XX ± .03 .XXX ± .010
C	3696, Add discharge	8/01/16	DSW	FRACTIONAL ± 1/32	
B	3345, Enclosure Update	9/08/15	DSW		
A	As built	8/10/15	BWM		
NO	REVISION	DATE	BY	ANGULAR	TOLERANCES (EXCEPT AS NOTED)

TCL W132N10611 (Rev. 11/16)
Germantown, WI 53022
© 2022 TCL, LLC

An Official Motors Group Company

MSD0022B300 MotorShield
Sinewave Filter 240/3/60, Type 1/ 3R

DRN BY: BWM DATE: 8/10/15 FILE: 106102DG
SCALE: 1:4.25 DRAWN BY: CSE SHT 1 OF 1