



SUGGESTED CUSTOMER ENTRANCE.

0.50 DIA HOLES
4 PLACES.


KTRMG NOTE: REACTOR SIZE SHOWN WILL VARY WITH HORSEPOWER.

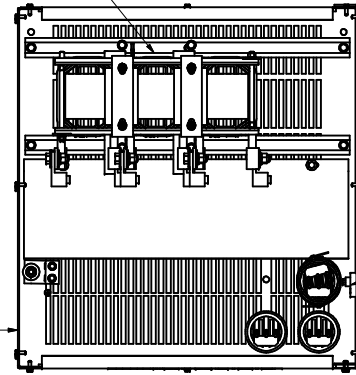


TERMINAL BLOCK ASSEMBLY, MOUNTED ABOVE CAPACITORS



NOTE: NUMBER OF CAPACITORS VARY ON HORSEPOWER.

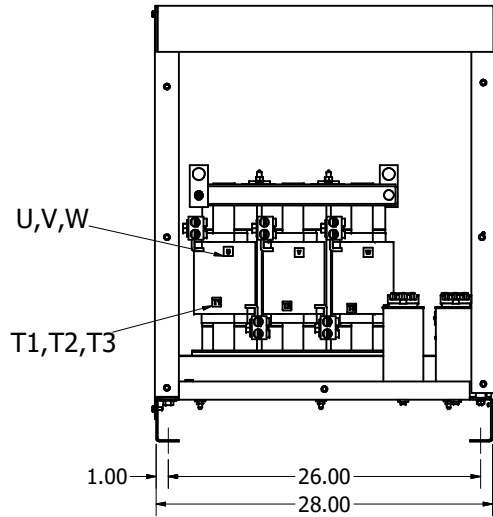

1.00 26.00 28.00

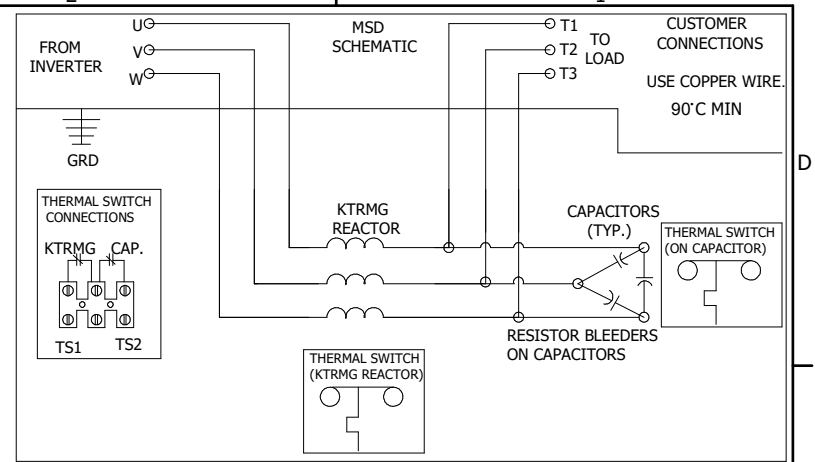

NOTE: FOR TERMINAL TORQUE SEE IOM MANUAL.

MSD PART NUMBER	HP	VOLTAGE	CURRENT	WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSD0080B300	30	240V	80 AMPS	340LBS	250MCM-1AWG
MSD0104B300	40	240V	104 AMPS	425LBS	(2) 350MCM-6AWG
MSD0130B300	50	240V	130 AMPS	450LBS	(2) 350MCM-6AWG
MSD0154B300	60	240V	154 AMPS	460LBS	(2) 350MCM-6AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .03
.XXX ± .010
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCL W132N10611 (Rev. 11/16)
Germantown, WI 53022
© 2022 TCL, LLC
An Official Motors Group Company
MSD 80-125A MotorShield
Sinewave Filter 240/3/60, Type 1/ 3R
DWN BY: JRN DATE: 4/17/20
SCALE: 1:8 DRAWN: 108578DG
SHT. 1 OF 1