

4 3 2 1





Unit Specifications					
kVar	Harmonic	Volt	HZ.	Phase	HP
55	5TH	600	60	3	350

Note: For Torque Information See IOM Manual

Customer Connections.
L1, L2, L3, T1, T2, T3
Wire Range: (2) 350MCM to 4AWG.

Ground Lug
Wire Range: (2) 350MCM to 4AWG.

HGL Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0350CW3S0000	30807-S	875
HGL0350CW3C0000	30807-C	880
HGL0350CW3S1000	30807-PQ1	878
HGL0350CW3C1000	30807-PQ	883

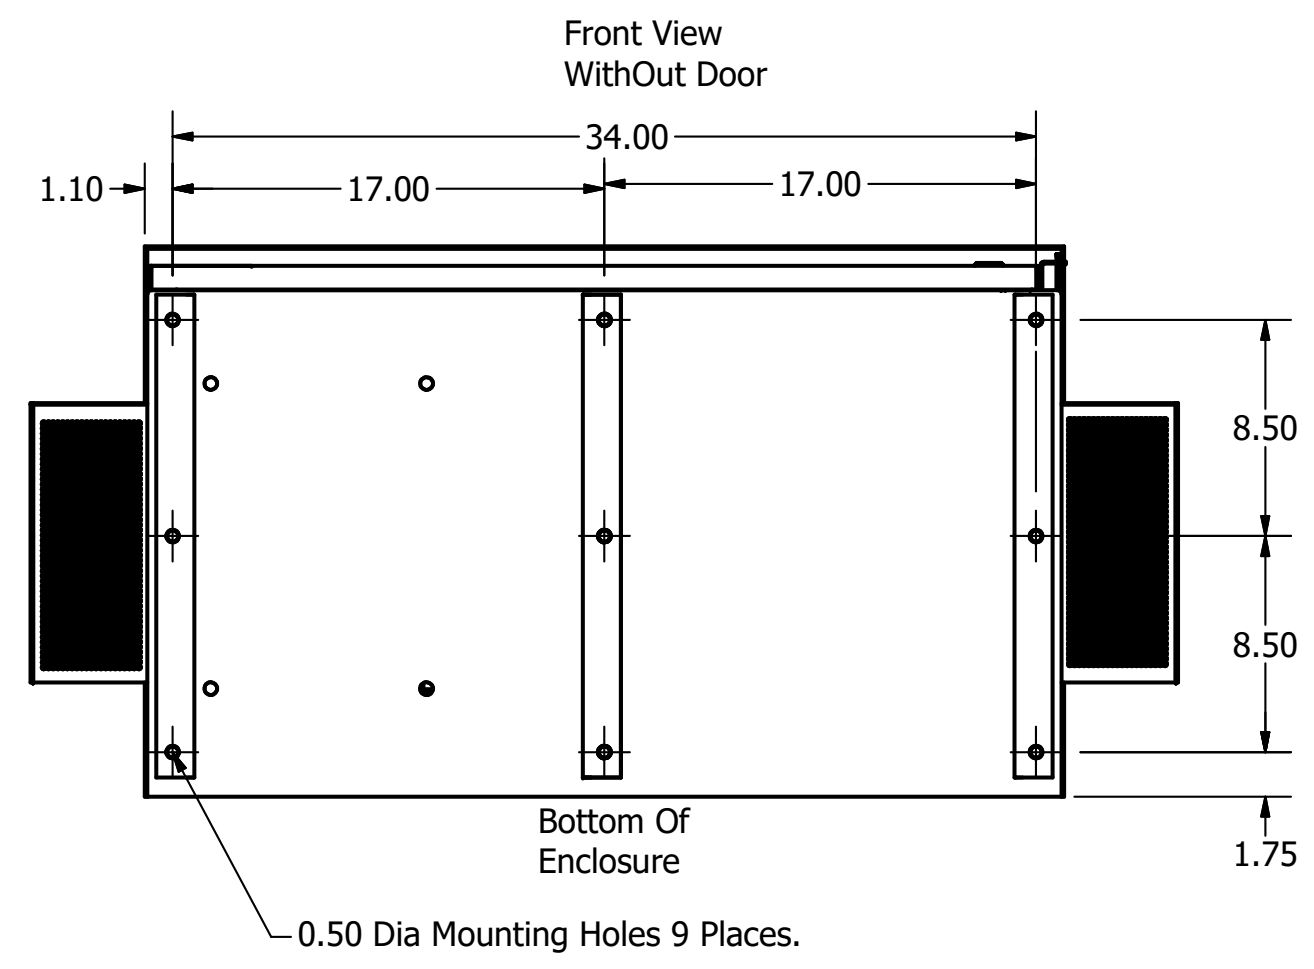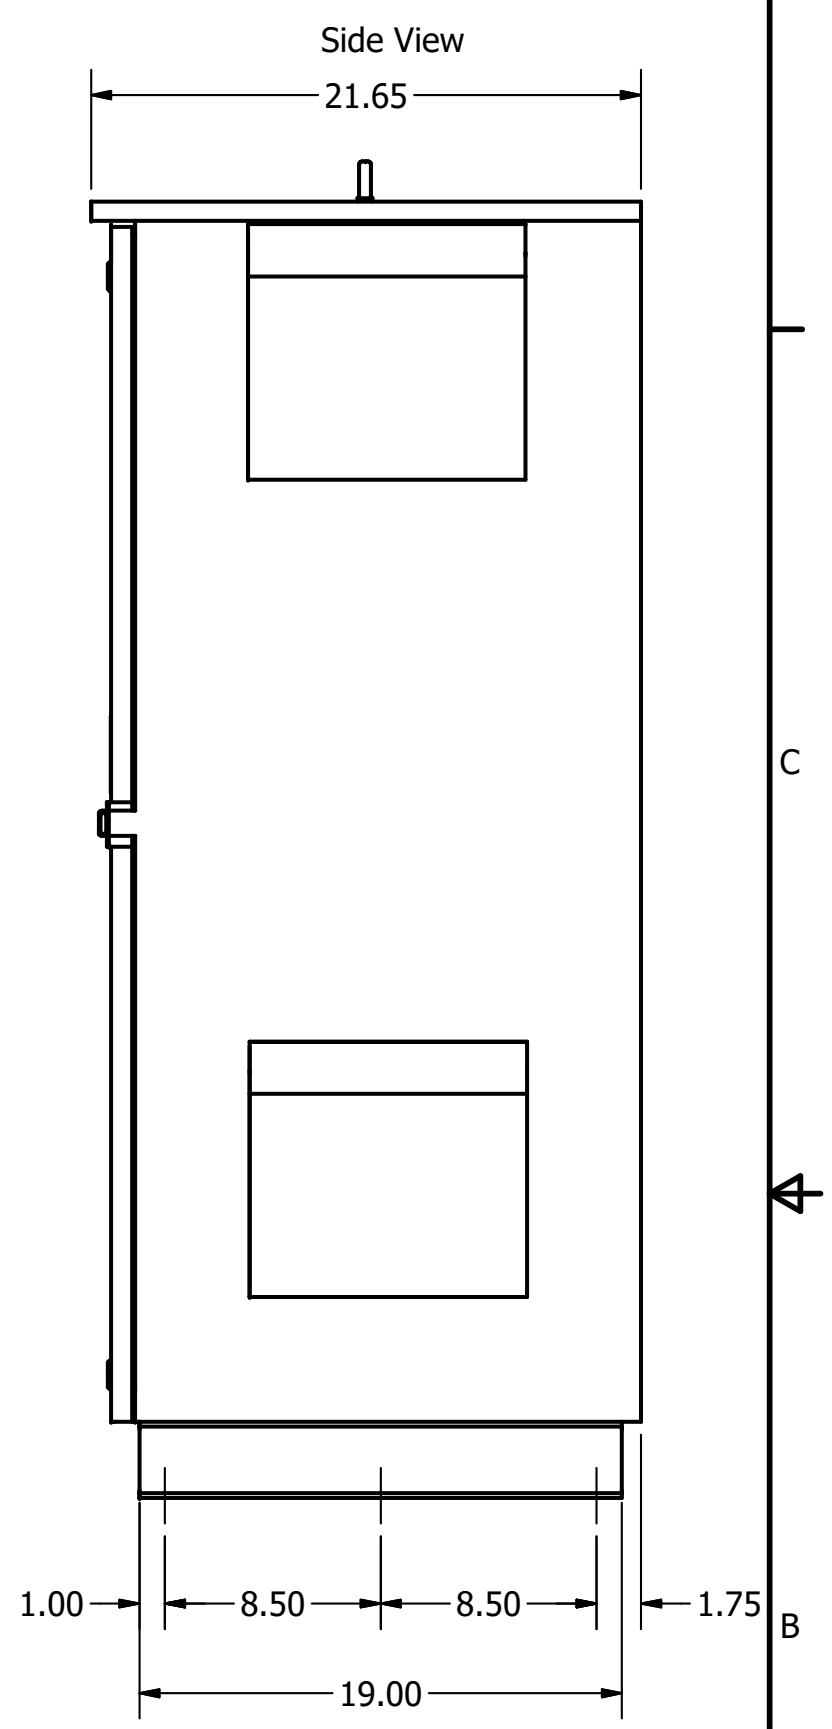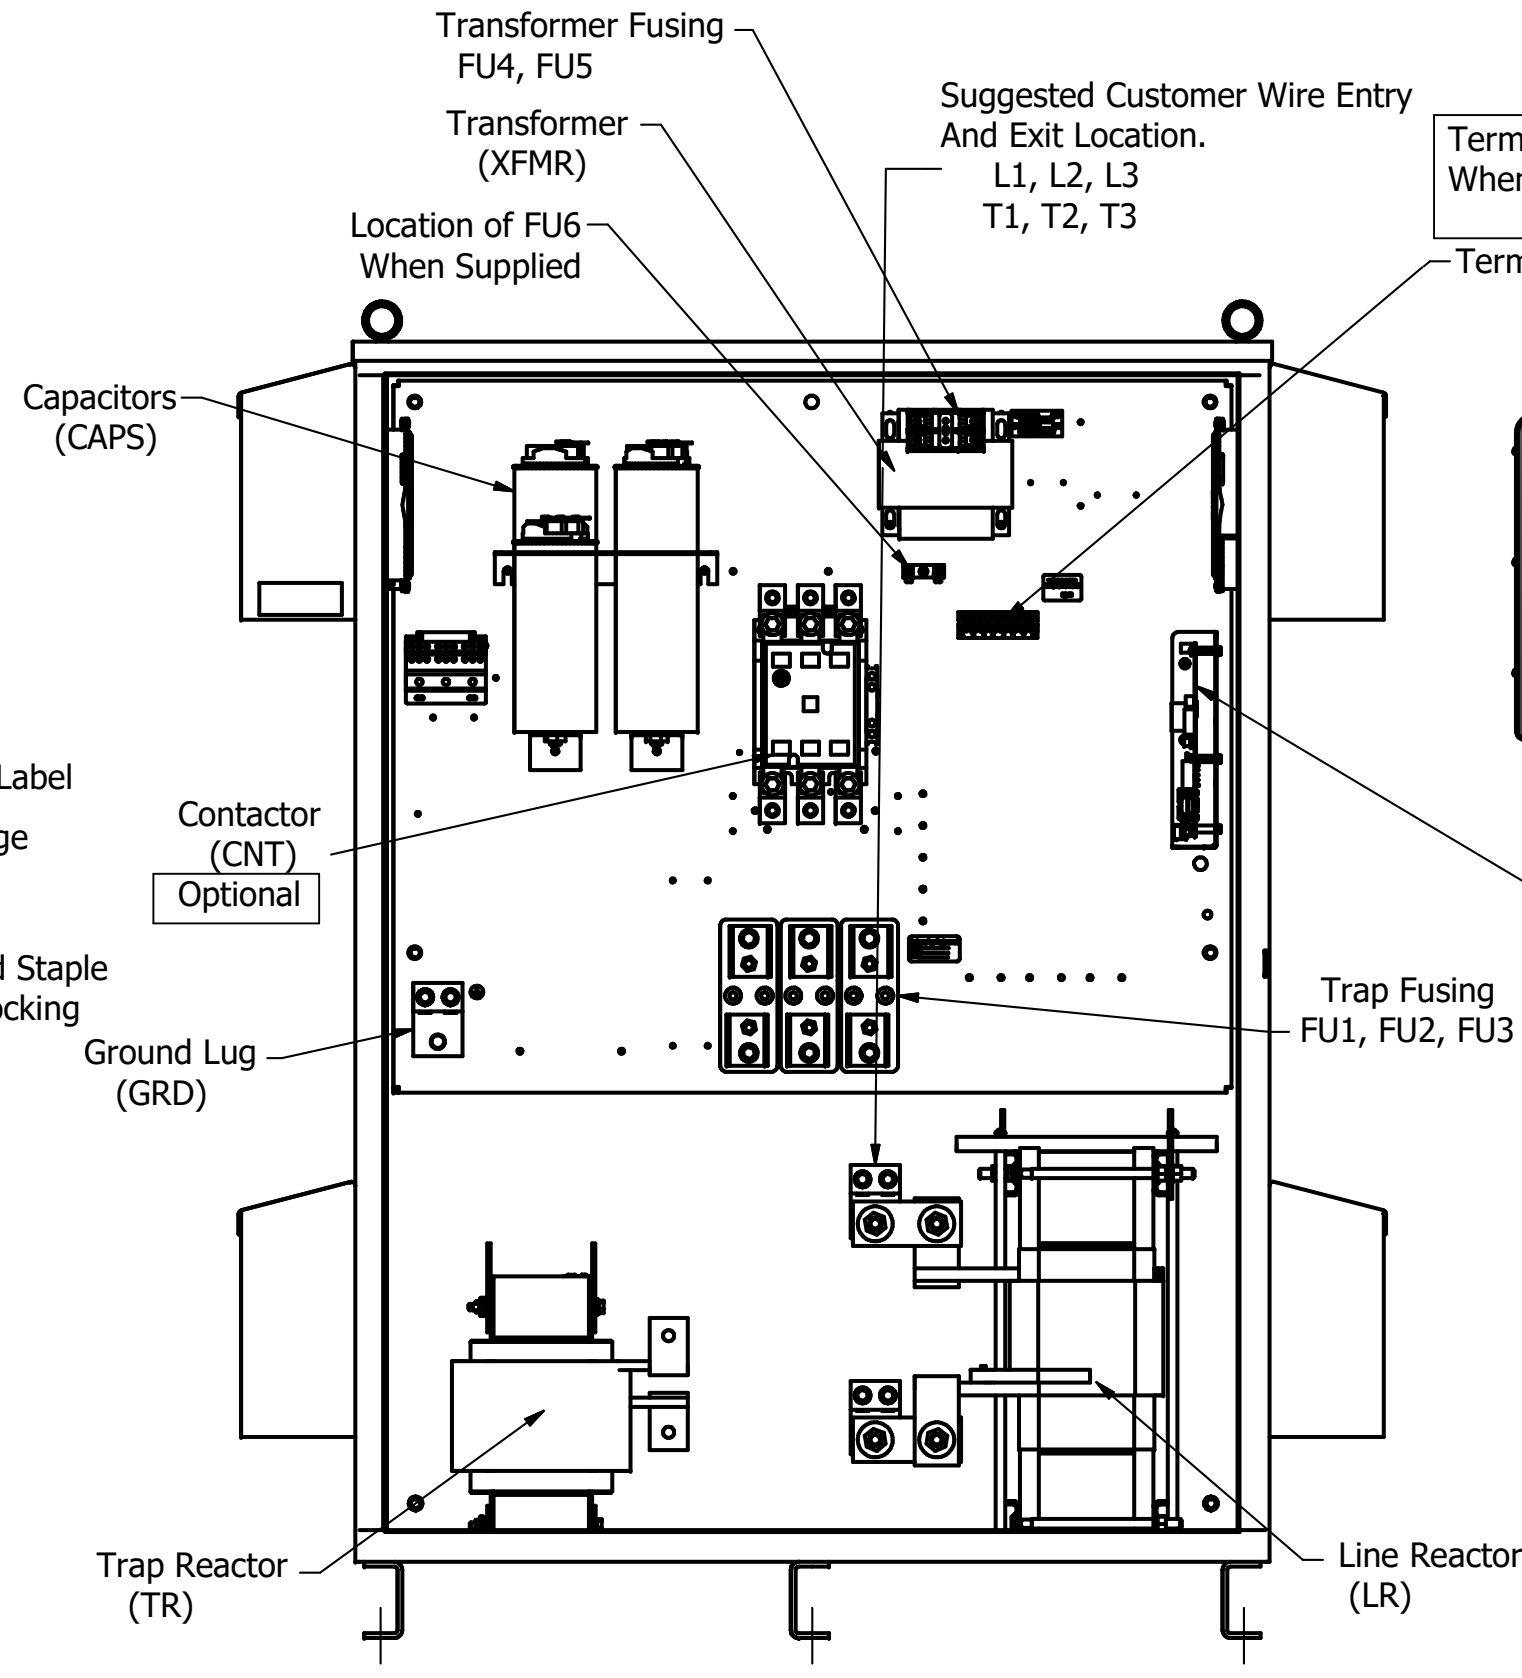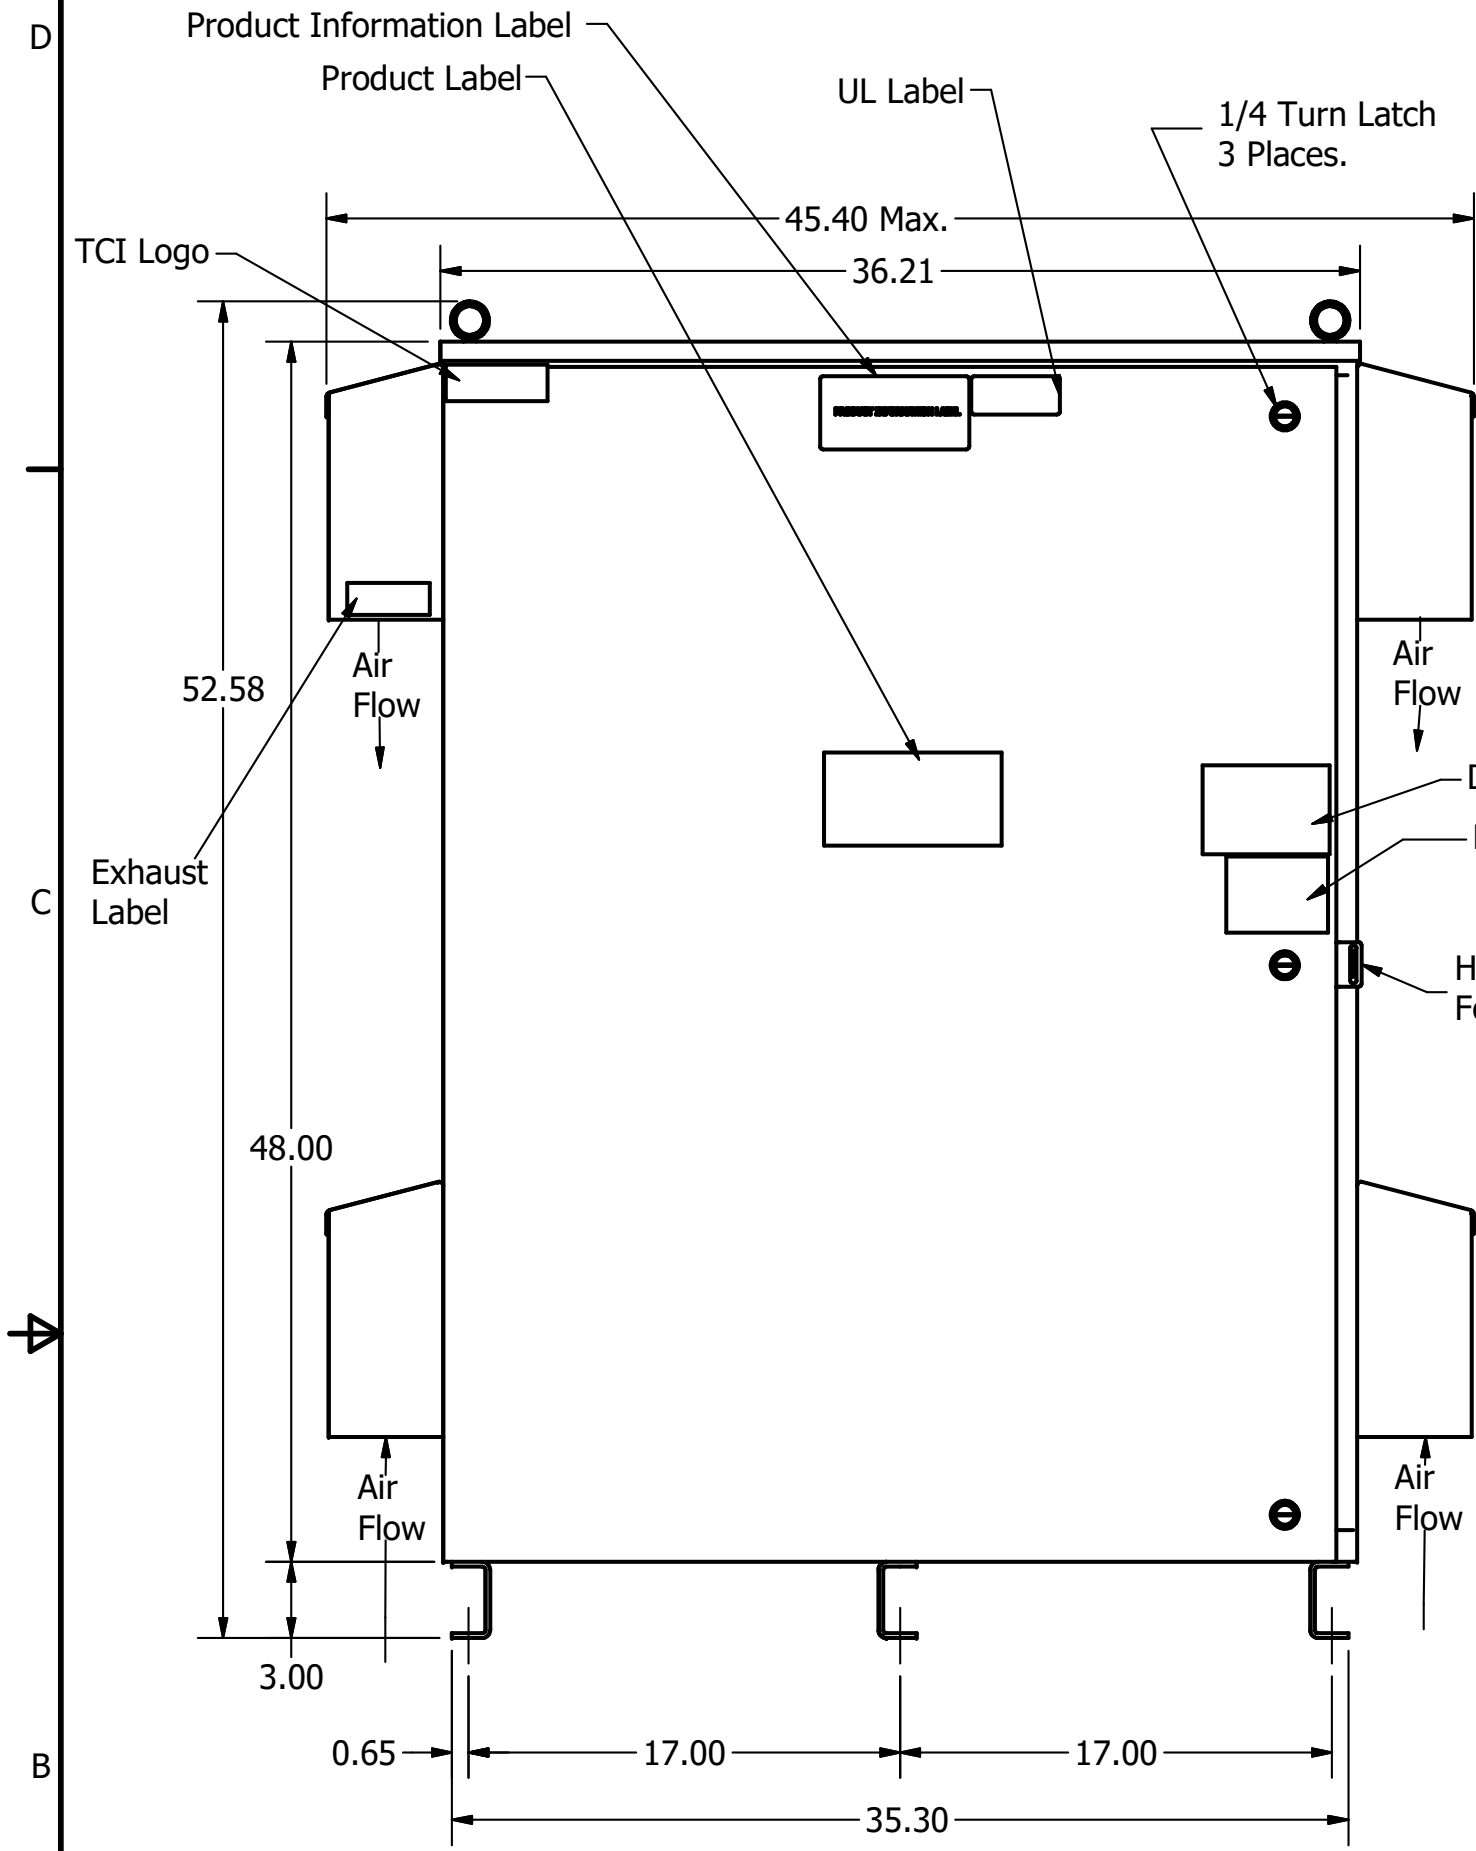

HGP0350CW3-----				
Components	S0000	C0000	S1000	C1000
Line Reactor (LR)	x	x	X	X
Trap Reactor (TR)	x	x	X	X
Capacitor (Cap)	x	x	X	X
Trap Fusing, FU1, FU2, FU3	x	x	X	X
Contactor (CNT)		x		X
Transformer (XFMR)	x	x	X	X
XFMR Fusing, FU4, FU5	x	x	X	X
PQConnect Board			X	X

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.
NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.	TOLERANCES (EXCEPT AS NOTED)		W132 N10611 Grant Drive Germantown, WI 53022 HarmonicGuard Low Capacitance HGL, 350HP, 600/3/60, Type 3R
	DECIMAL		
	.XX ± .25 .XXX ± .10		
	FRACTIONAL ± 1/16		
B Add PQConnect	3/25/19	DSW	DRN BY: DSW DATE: 10/9/17 107314DG
NO REVISION	DATE	BY	SCALE: 1/8 APRVD: SIZE C SHT 1 OF 1

4 3 2 1