


| HGP Part Number | HorsePower (HP) | kVar | Harmonic | Voltage (V) | Hz. | Phase |
|-----------------|-----------------|------|----------|-------------|-----|-------|
| HGP0350CW3----  | 350             | 105  | 5th      | 600         | 60  | 3     |
| HGP0400CW3----  | 400             | 120  | 5th      | 600         | 60  | 3     |

| HGP Part Number | Schematic Drawing # | Approx Weight (LBS) |
|-----------------|---------------------|---------------------|
| HGP0350CW3S0000 | 29474-4             | 956                 |
| HGP0350CW3C0000 | 29474-5             | 966                 |
| HGP0350CW3C000H | 29475-6             | 1000                |
| HGP0350CW3C1000 | 29474-PQ1           | 958                 |
| HGP0350CW3C1000 | 29474-PQ            | 968                 |
| HGP0350CW3C100H | 29474-PQH           | 1002                |




| HGP Part Number | Schematic Drawing # | Approx Weight (LBS) |
|-----------------|---------------------|---------------------|
| HGP0400CW3S0000 | 29474-4             | 966                 |
| HGP0400CW3C0000 | 29474-5             | 976                 |
| HGP0400CW3C000H | 29474-6             | 1010                |
| HGP0400CW3C1000 | 29474-PQ1           | 968                 |
| HGP0400CW3C1000 | 29474-PQ            | 978                 |
| HGP0400CW3C100H | 29474-PQH           | 1012                |




Note: For Torque Information See IOM Manual

Customer Connections. L1, L2, L3, T1, T2, T3 Wire Range: (Two) 350MCM to 4AWG.

Ground Lug Wire Range: (Two) 350MCM to 4AWG.

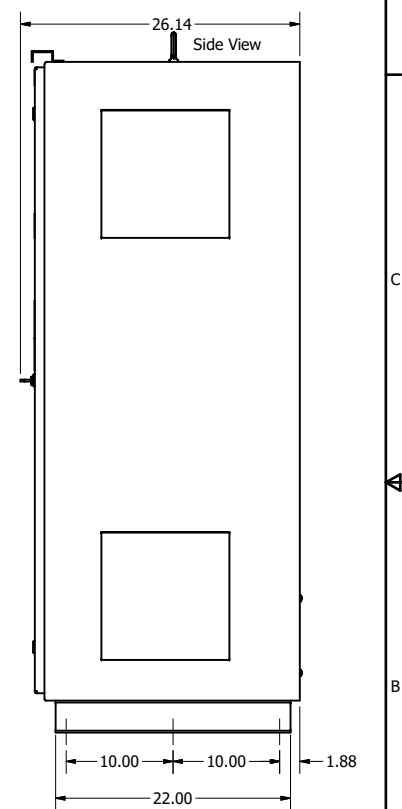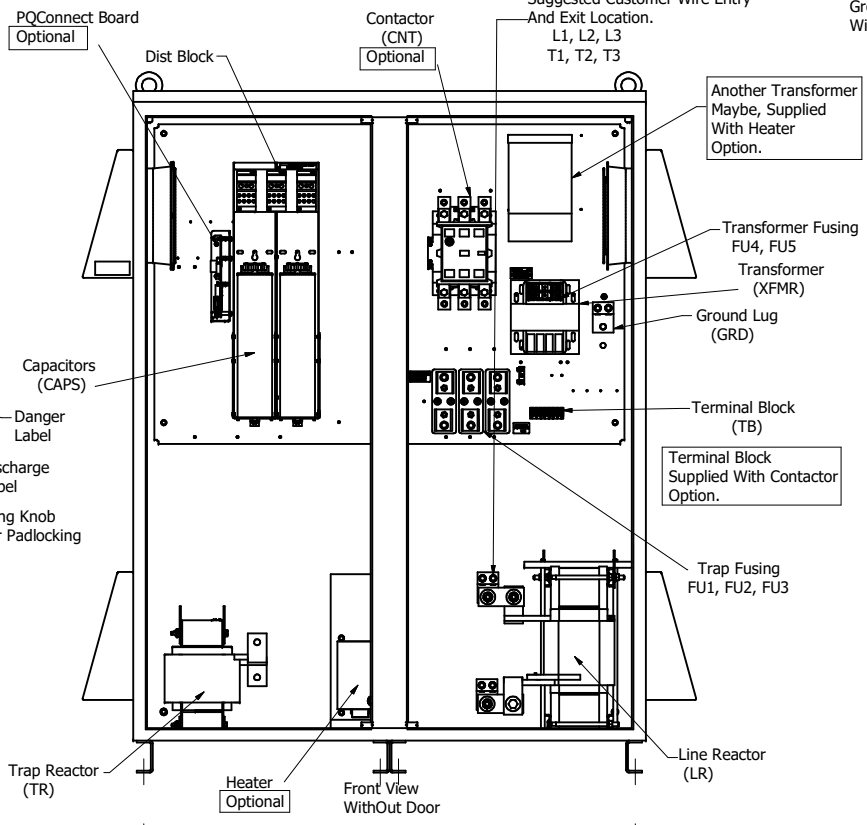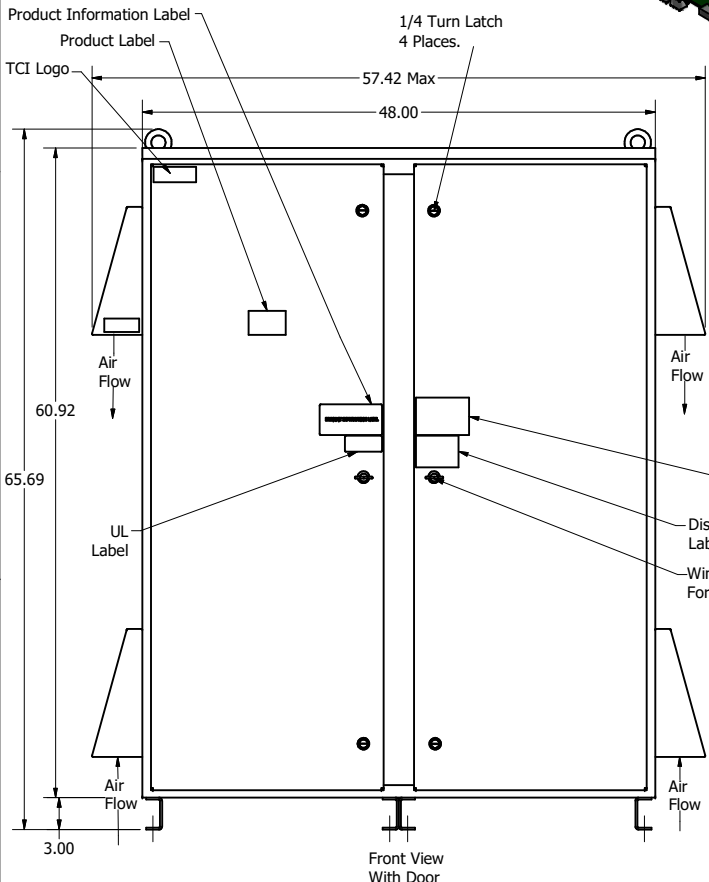

| Components                 | HGP0350CW3----- |       |       | HGP0400CW3----- |       |       |
|----------------------------|-----------------|-------|-------|-----------------|-------|-------|
|                            | S0000           | C0000 | C000H | S1000           | C1000 | C100H |
| Line Reactor (LR)          | x               | x     | x     | X               | X     | X     |
| Trap Reactor (TR)          | x               | x     | x     | X               | X     | X     |
| Capacitor (Cap)            | x               | x     | x     | X               | X     | X     |
| Trap Fusing, FU1, FU2, FU3 | x               | x     | x     | X               | X     | X     |
| Contactor (CNT)            |                 | x     | x     |                 | X     | X     |
| Transformer (XFMR)         | x               | x     | x     | X               | X     | X     |
| XFMR Fusing, FU4, FU5      | x               | x     | x     | X               | X     | X     |
| Heater                     |                 |       | x     |                 |       | X     |
| PQConnect Board            |                 |       |       | X               | X     | X     |

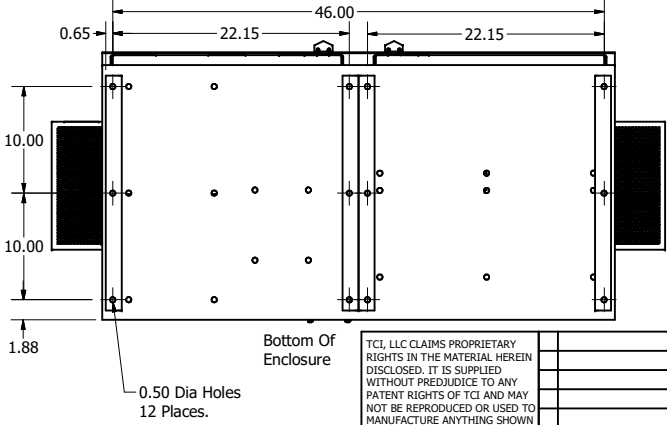

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.  
NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

Material(s) Shall be RoHS Compliant

TCL, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCL AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCL.

|     |        |     |               |
|-----|--------|-----|---------------|
| REV | DATE   | BY  | DESCRIPTION   |
| B   | 9/5/18 | DSW | Add PQConnect |
| NO  |        |     | REVISION      |

|                              |   |
|------------------------------|---|
| TOLERANCES (EXCEPT AS NOTED) | W132 N10611 Grant Drive Germantown, WI 53022                  |
| DECIMAL                      | HarmonicGuard Passive<br>HGP, 350HP, 400HP, 600/3/60, Type 3R |
| .XX ±.25<br>.XXX ±.10        |   |
| FRACTIONAL                   | 105912DG  |
| ± 1/16                       | DATE 2/11/15  |
| ANGULAR                      | SCALE 1/9   |
| ± 1°                         | DRN BY DSW  |