

TECO MAV200 +PLUS



TECO  **Westinghouse**




Features and Benefits

- **Pump Talk Software** - The MA7200 Plus has the features that provide a complete package for pump controls. These features include both a PID control package for the motor as well as an external PID function for a related plant process.
- **Sensorless Vector** – The MA7200 Plus has precise speed and torque control for the most demanding system performance and simple set-up through an auto-tuning function. It can be operated in sensorless vector or V/Hz mode to match the user's specific application.
- **Graphical LCD Operator** - The MA7200 Plus offers easily read parameters and status in plain English text on a 2 line by 20 character lighted LCD, eliminating the need to memorize parameters - the user can set up the drive without an instruction manual! Straight forward monitoring of drive status through the operator is also available, which simplifies set-up and troubleshooting.
- **Parameter Copy** - No extra hardware is required on this drive. The copy feature is included as standard in the keypad. Simple cloning of the drive program is available, making it perfect for the OEM.
- **Flexible Input/ Output Options** - The MA7200 Plus offers sink or source selectable digital inputs* - 4 Preset, 4 User Programmable, 16 Preset Speeds, 2 Analog Inputs, 2 Analog Outputs, 3 Multi-Function Output Contacts - 1 Form C Relay, 1 Form A Relay, and 1 Open Collector Output.
- **Two Built-in PID Control Loops** - Revised Powerful Programming Options - The MA7200 Plus allows the user to set up basic parameters for simple tasks or take advantage of advanced features for demanding applications.
- **Communications** - The MA7200 Plus has Modbus RTU as standard. The user can control, program, and monitor the drive(s) over an industrial network. Other protocols are also available as options.
- **Performance** - User Selectable V/F Curves + S Curves are available.
- **Motor/ Drive Systems** - Pair the MA7200 Plus with a TECO-Westinghouse motor for single source reliability.

*1-2 HP Models are sink mode only.



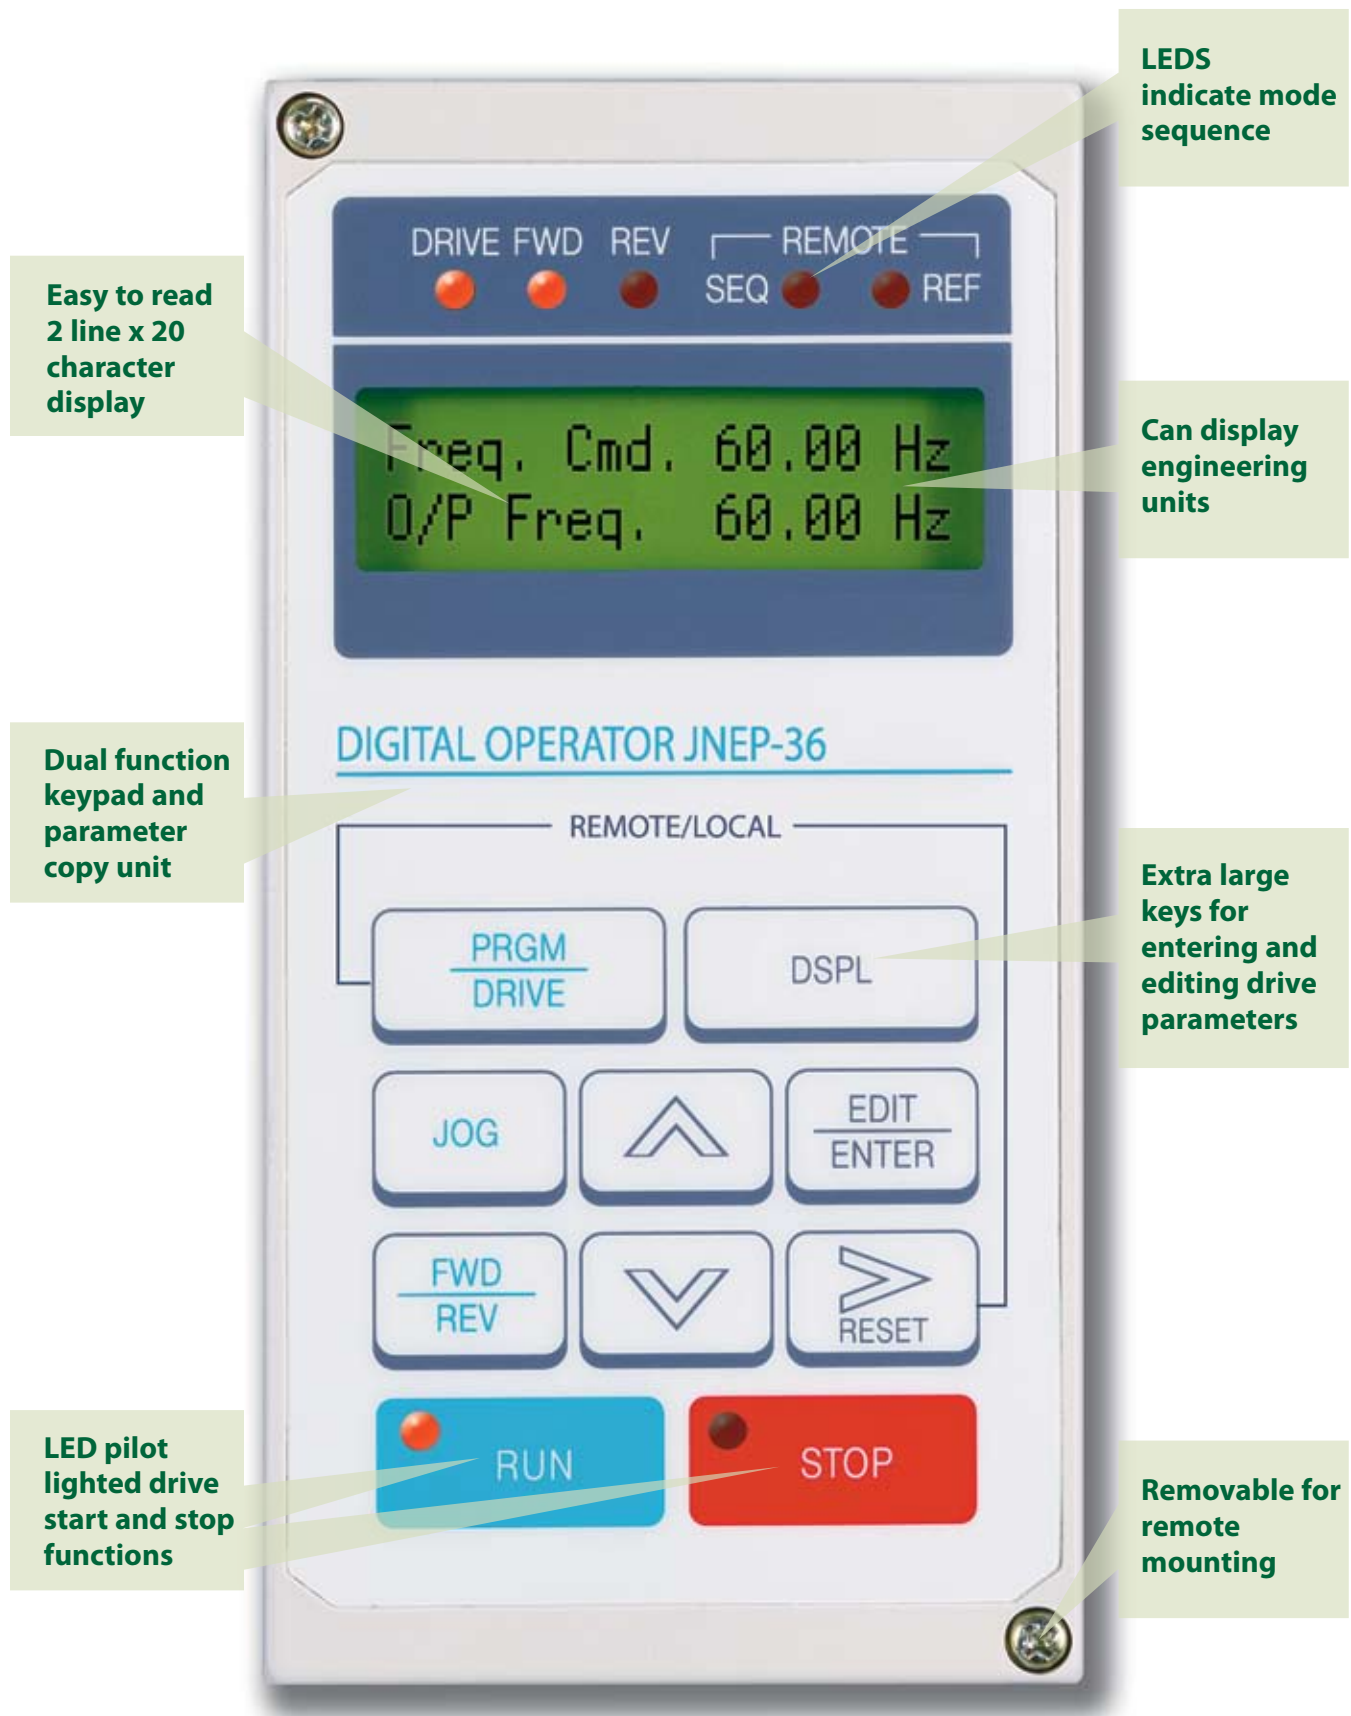

Specifications

Output Characteristics	MA7200 NEMA 1	208 - 230V 380 - 460V	1 - 50 HP Variable Torque 1 - 40 HP Constant Torque 1 - 100 HP Variable Torque 1 - 100 HP Constant Torque*
	Maximum Voltage	230 Volt 460 Volt	3-Phase, 208 - 230V 3-Phase, 380 - 460V
	Rated Output Frequency	0 - 400Hz	
	Output Frequency Resolution	0.01Hz	
Power Supply	Rated Input Voltage & Frequency	230 Volt 460 Volt	1 - 3 HP 1/3-Phase, 208 - 230V, 50/60Hz 5 - 40 HP 3-Phase, 208 - 230V, 50/60Hz 1 - 100 HP 3-Phase, 380 - 460V, 50/60Hz*
	Voltage Fluctuation	+10%, -15%	
	Frequency Fluctuation	+/-5%	
Control Characteristics	Control Mode	Selectable Sensorless Vector, V/Hz, V/Hz with PG Feedback	
	Operation Mode	English LCD Display	
	Programmable Carrier Frequency:	2.5 - 15kHz	
	Frequency Control Range	0.5 - 400Hz	
	Frequency Accuracy	Digital Command: +/-0.01% (+14°F - 104°F) Analog Command: +/-1% (77°F +/-14°F)	
	Speed Control Accuracy	+/-0.5% (Sensorless Vector) +/-0.1% (V/Hz with PG Feedback)	+/-2% V/Hz
	Frequency Command Resolution	Digital Command: 0.01Hz Analog Command: 0.06/60Hz	
	Overload Capacity	Constant Torque: 150% Rated Output Current for 60 Sec. Variable Torque: 110% Rated Output Current for 60 Sec.	
	Frequency Setting Signal	0 - 10VDC, 4 - 20mA	
	Accel/ Decel Time	0.0 - 6000 Sec. (Independent Accel/Decel Time Settings)	
	Number of V/F Patterns	15 Preset V/F Patterns, 1 Custom V/F Pattern	
	Braking Torque	Approximately 20%	
Protective Functions	Stall Prevention	Stall Prevention at Acceleration/Deceleration and Constant Speed Operation	
	Instantaneous Overcurrent	200% of Rated Output Current	
	Motor Overload Protection	Electronic Overload Protection	
	Overvoltage (230V Series) (460V Series)	Motor Coasts to a Stop if Inverter Bus Voltage Exceeds 410VDC Motor Coasts to a Stop if Inverter Bus Voltage Exceeds 820VDC	
	Undervoltage (230V Series) (460V Series)	Motor Coasts to a Stop if Inverter Bus Voltage drops to 200VDC or Below Motor Coasts to a Stop if Inverter Bus Voltage drops to 400VDC or Below	
	Momentary Power Loss	Motor Coasts to a Stop after Momentary Power Loss Lasting over 15ms	
	Overheat Protection	Protected by Thermistor	
	Ground Fault	Protected by DC Current Sensor	
	Power Charge Indication (LED)	Charge Lamp Stays ON Until Bus Voltage Drops Below 50VDC	

*100 HP constant torque with a nominal 460V 4-Pole Motor.

Control Connections	Control Power	24VDC
	Speed Reference Supply	12VDC, 20mA
	Analog Input	0 - 10VDC, Input Impedance 20k Ohms 4 - 20mA, Input Impedance 250 Ohms External Speed Potentiometer, 0 - 10VDC, 2k Ohms Minimum, .5 Watt
	Auxiliary Analog Input	1 Programmable, 0 - 10VDC, Input Impedance 20k Ohms
	Analog Outputs	2 Programmable, 0 - 10VDC
	Digital Inputs	8 Digital Inputs (4 Programmable): Positive or Negative Control Logic
	Digital Outputs	1 Programmable Form C Relay, 250VAC, 1 Amp or 30VDC, 1 Amp* Programmable Open Collector, 48VDC, 50mA**
	Serial Communications	RS-485 Port, MODBUS Protocol
Environmental Conditions	Location	Indoor (Protected from Dust and Corrosive Gases)
	Ambient Temperature	+14 to 104°F (Not Frozen)
	Storage Temperature	-4 to 140°F
	Humidity	<90% RH (Non-Condensing)
	Vibration	<1000m, 5.9m/s ² (0.6G)
Certifications/ Compliance	UL, cUL, CE	
	EN50081-2 (Requires External EMI/RFI Filter)	
	EN50082-2	


*Not available for 1 or 2 HP Models

**Qty 2 available for 1 and 2 HP Models




A Complete Line of Accessories for the MA700 PLUS:
Noise filter, AC Reactor, PROFIBUS Board, Braking Resistor,
Analog Operator, Keypad Extension Cable.

Standard Connection Diagram

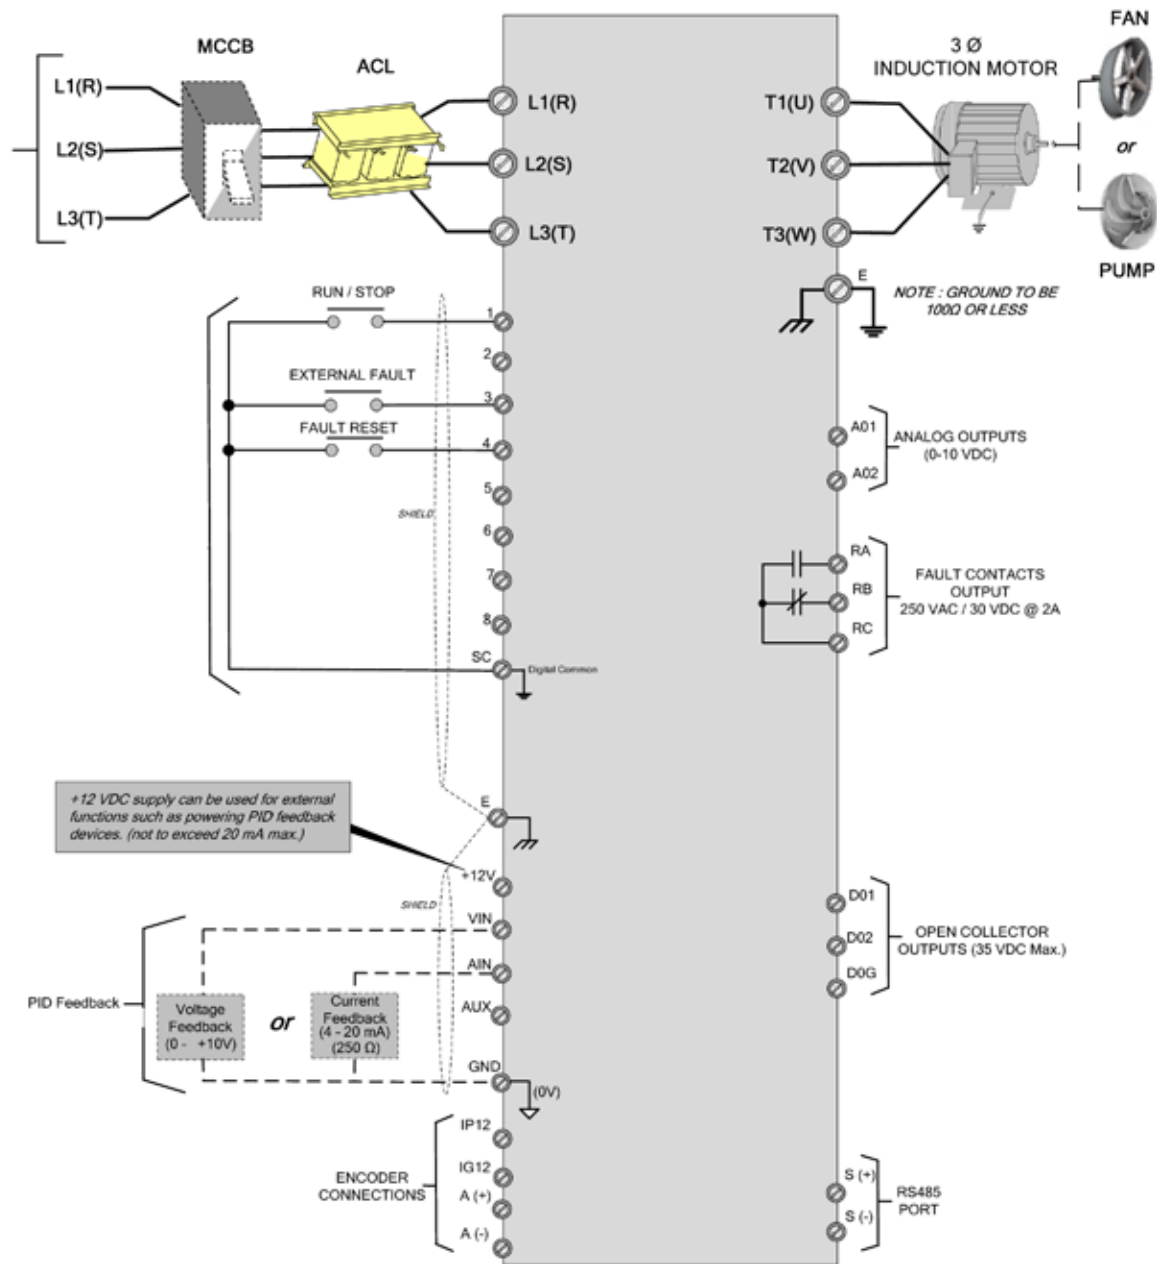

MA7200 Plus Wiring Diagram 1 to 2 HP

Standard Connection Diagram

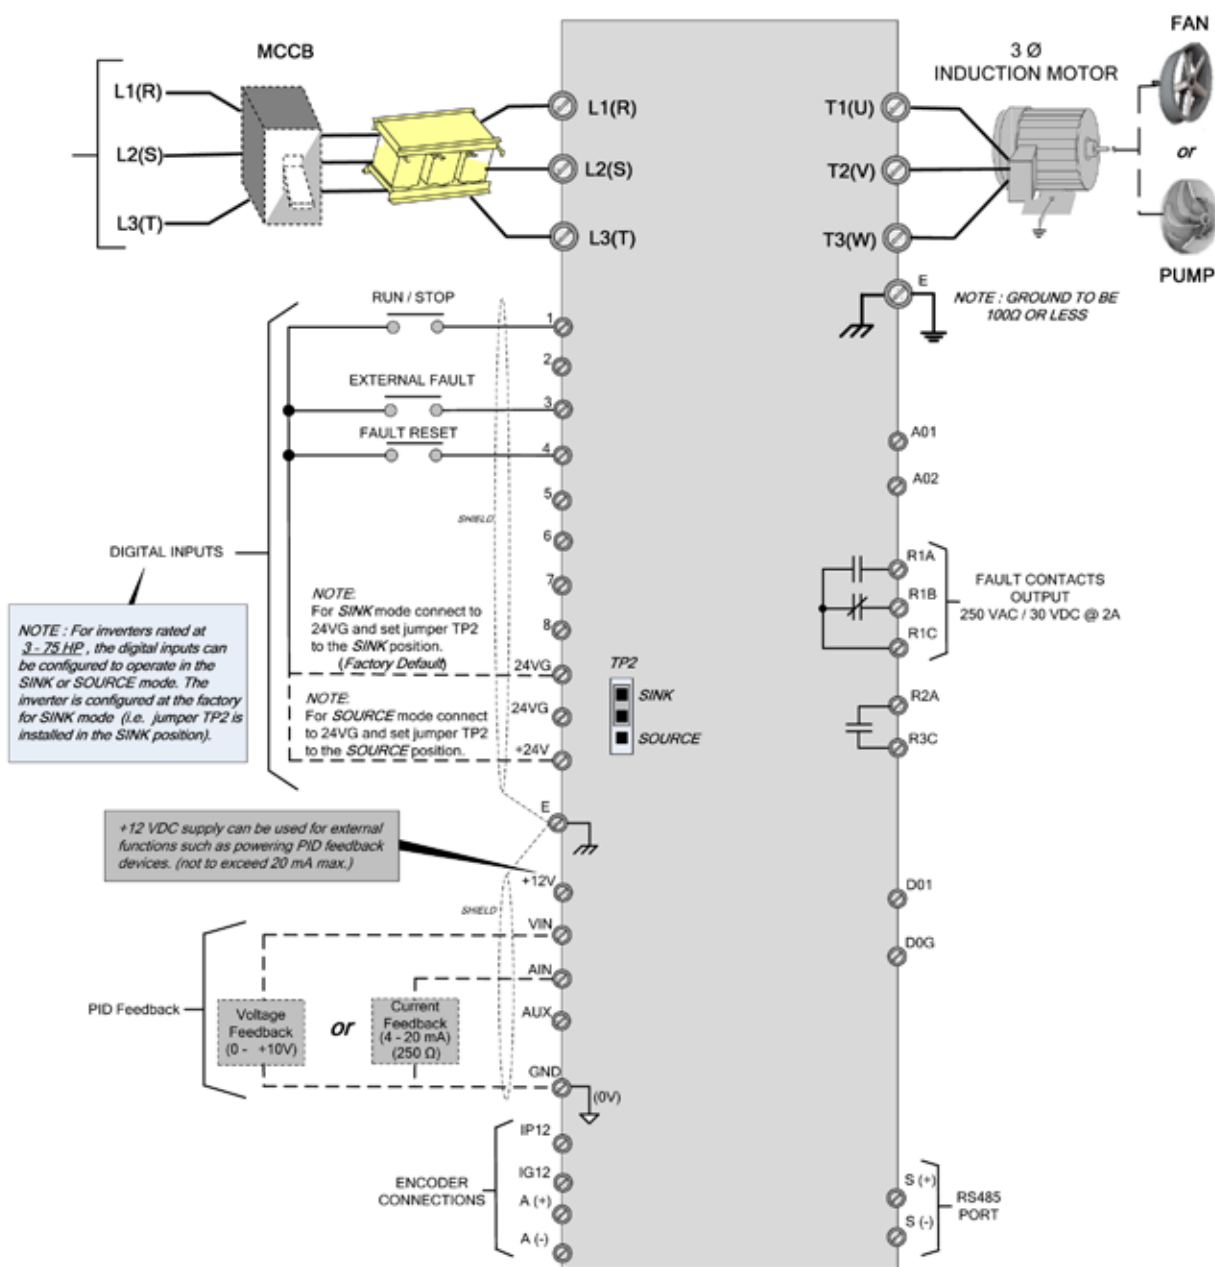

MA7200 Plus Wiring Diagram 3 to 100 HP

Dimensions and Output Characteristics

230V 1/3-Phase

MODEL NO.	HP		DRIVE AMPS		DIMENSIONS (Inches)			APPROX. WEIGHT (lbs.)
	CONSTANT TORQUE	VARIABLE TORQUE	CONSTANT TORQUE	VARIABLE TORQUE	HEIGHT	WIDTH	DEPTH	
MA7200-2001-N1	1	1	4.8	5.6	8.54	5.20	5.65	6
MA7200-2002-N1	2	2	6.4	7.6	8.54	5.20	5.65	6
MA7200-2003-N1	3	3	9.6	9.8	11.00	5.51	6.95	9

230V 3-Phase

MODEL NO.	HP		DRIVE AMPS		DIMENSIONS (Inches)			APPROX. WEIGHT (lbs.)
	CONSTANT TORQUE	VARIABLE TORQUE	CONSTANT TORQUE	VARIABLE TORQUE	HEIGHT	WIDTH	DEPTH	
MA7200-2005-N1	5	7.5	17.5	22.7	11.00	5.51	6.95	9
MA7200-2007-N1	7.5	10	24	32.0	11.81	8.32	8.46	13
MA7200-2010-N1	10	10	32	32.0	11.81	8.32	8.46	13
MA7200-2015-N1	15	20	48	56.7	14.17	10.43	8.86	27
MA7200-2020-N1	20	25	64	70.9	14.17	10.43	8.86	27
MA7200-2025-N1	25	30	80	80	14.17	10.43	8.86	29
MA7200-2030-N1	30	30	96	108	25.45	10.60	10.91	67
MA7200-2040-N1	40-50	50	130	130	25.45	10.60	10.91	67

460V 3-Phase

MODEL NO.	HP		DRIVE AMPS		DIMENSIONS (Inches)			APPROX. WEIGHT (lbs.)
	CONSTANT TORQUE	VARIABLE TORQUE	CONSTANT TORQUE	VARIABLE TORQUE	HEIGHT	WIDTH	DEPTH	
MA7200-4001-N1	1	1	2.6	2.9	8.54	5.20	5.65	6
MA7200-4002-N1	2	2	4	4.6	8.54	5.20	5.65	6
MA7200-4003-N1	3	3	4.8	4.9	11.00	5.51	6.95	9
MA7200-4005-N1	5	7.5	8.7	12.5	11.00	5.51	6.95	9
MA7200-4007-N1	7.5	10	12	15.4	11.81	8.32	8.46	13
MA7200-4010-N1	10	15	15	22.7	11.81	8.32	8.46	13
MA7200-4015-N1	15	20	24	30.3	14.17	8.32	8.86	27
MA7200-4020-N1	20	25	32	38	14.17	10.43	8.86	27
MA7200-4025-N1	25	30	40	44	14.17	10.43	8.86	29
MA7200-4030-N1	30	30	48	48	14.17	10.43	8.86	29
MA7200-4040-N1	40	50	64	71	25.45	10.60	10.91	67
MA7200-4050-N1	50	60	80	80	25.45	10.60	10.91	67
MA7200-4060-N1	60	75	96	108	29.39	12.13	11.11	102
MA7200-4075-N1	75-100*	100	128	140	29.39	12.13	11.11	102

*100 HP with a nominal 460V, 4 Pole Motor

The MA7200 Plus has a variety of available optional kits to provide users with comprehensive packages. The major options include:

■ Extension Cable Kits for Remote LCD Mounting

■ Fieldbus Communications Interfaces

- Modbus RTU
- N2
- P1
- Bacnet
- LON Works
- Profibus
- Devicenet
- Ethernet


■ Analog Operator Station for Remote Installation


■ Power - Matched Dynamic Braking Resistor and Transistor kits

■ Power - Matched Input Line and Output Load Reactors

■ Packaged Drive Solutions for Integrated Users that Include any of the Following

- NEMA 1, NEMA 12, NEMA 3R, NEMA 4, CUSTOM ENCLOSURES
- Multiple Input Disconnect Options Available
- 2 and 3 Contactor Bypass Transfer designs
- Dual Motor Outputs
- Multi Pump Transfer
- Disconnect Packages
- Packages with Power Quality Equipment Designed to meet IEEE - 519 Directives

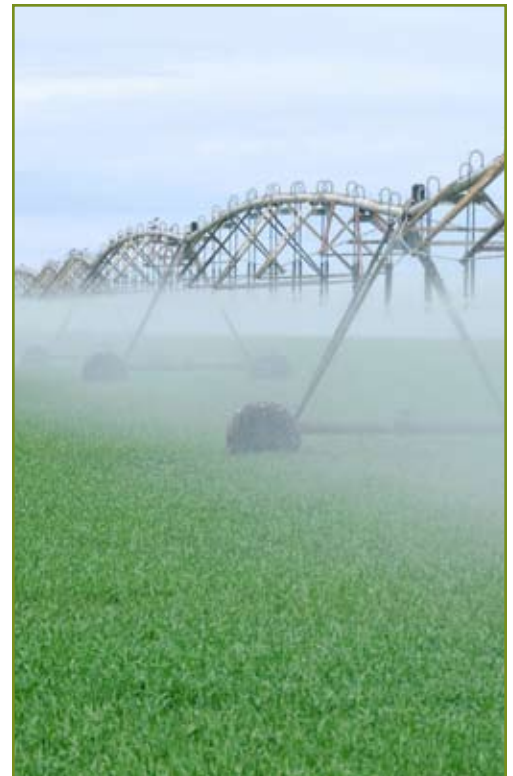

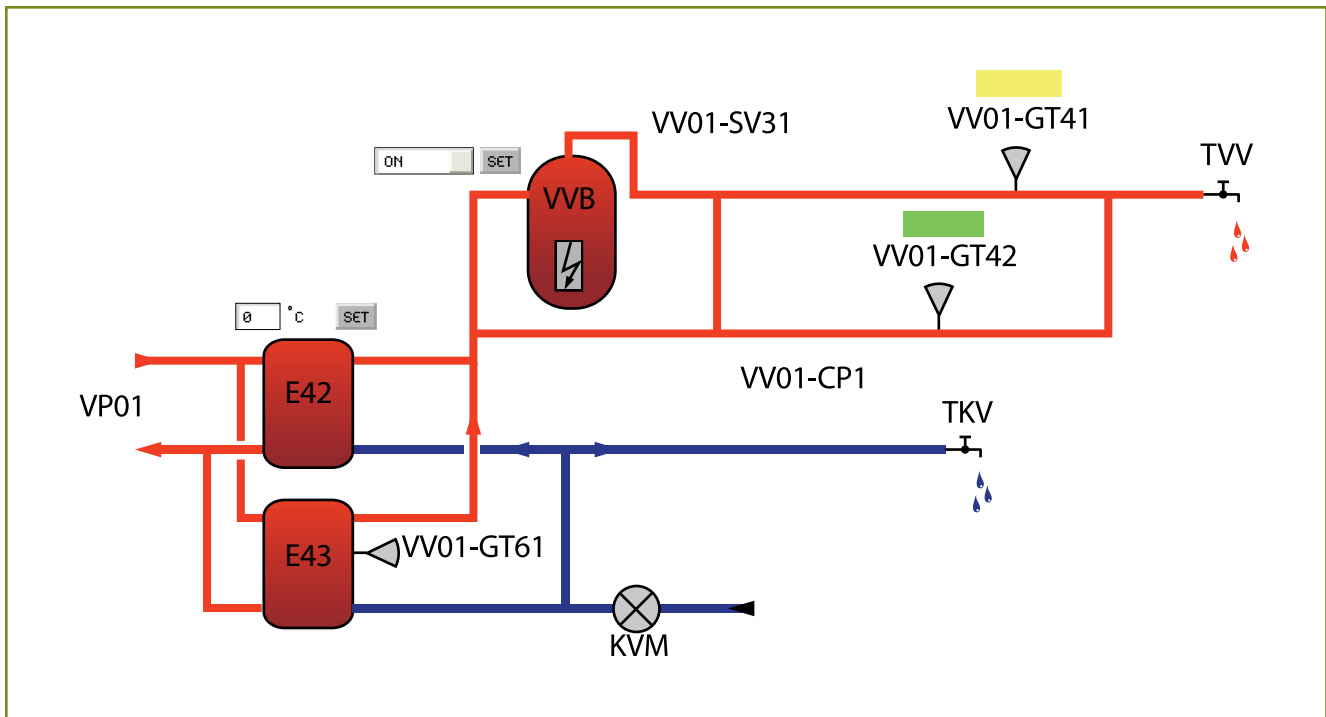


The HVAC~SCADA TW1 module acts as a bridge from Modbus TCP to Modbus RTU, making it possible for a Modbus TCP based controller to connect with Modbus RTU based devices. The HVAC~SCADA TW1 is a device that is not only designed to provide the bridging function, but to also handle alarm management, data-logging, as well as providing a web-based user interface for accessing data.

Features

- Graphical interface that is easy to work with.
- Support for device templates to allow easy and flexible management of configurations.
- Advanced modem handling, with support for GSM/GPRS modems as well as analog (PSTN) modems.
- Improved alarm handling, now with alarm history and SNMP support.
- Language support.
- Support for sending log-files with email or FTP
- Support for the HVAC~SCADA TW1 portal

The HVAC~SCADA TW1 Modbus Gateway supports an RS-232 connection through a 9-PIN DSUB or RS-485 through an RJ12 connector. It also supports 10/100Mbps Ethernet through a standard Ethernet connector (RJ-45).

It can be configured via a user-friendly web-interface or by using the HVAC~SCADA TW1 Configuration utility.

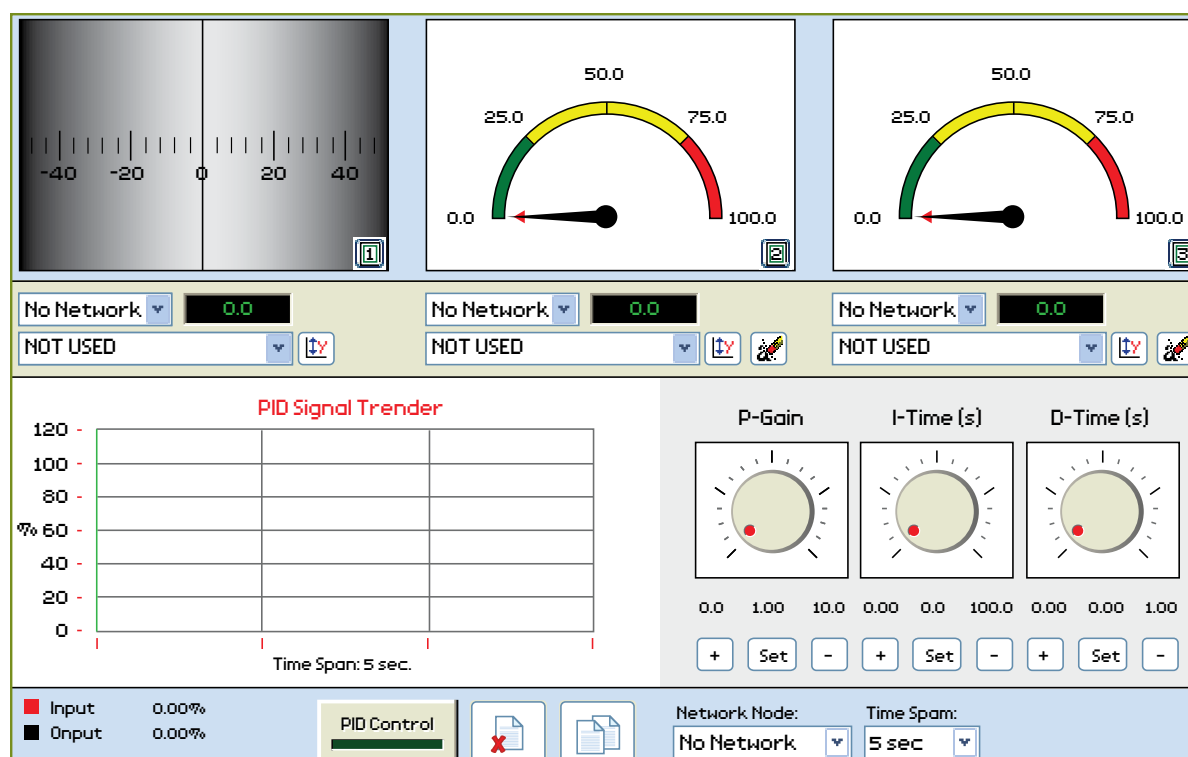

TECO-Link™ is a complete drive programming and monitoring program that provides control of TWMC's entire family of drives. In addition to emulating standard keypad interface functions, the program furnishes a variety of powerful diagnostic, monitoring, and data archiving tools to aid in troubleshooting and drive management.

System Overview Screen

TECO-Link™ graphically displays the status of each drive at a glance. Up to 15 parameters can be continuously monitored at once. The list of parameters that are displayed can be chosen for each drive independently.

Keypad Control

TECO-Link™ simulates the interfaces of all TWMC drives, allowing the user to remotely access all of the features and functions normally available at the drives themselves. Keypad control is accessible at any time from any screen.

Meter Screen

TECO-Link™ provides a graphical portrayal of drive data with the look and feel of a meter panel. Four meters can be viewed at a time, each of which can be configured to reflect a wide variety of readout or parameter values.

Graph Display Screen

TECO-Link™ provides a trend recorder which allows users monitor and record data much like a graph recorder. Data can be stored and analyzed in either raw or graphical formats. Sampling rates can be varied to meet short- and long-term monitoring requirements.

Data Archiving

TECO-Link™ provides a data-archiving feature that lets users manage the drive's parameter set. With the single click of a button, a complete record of every parameter can be captured for safekeeping on disk, for printing, or for editing offline. Data can be quickly restored in case of emergency, or copied to another drive for quick setup. Archives can also be compared to determine which parameters have changed.



5100 N. IH-35
Round Rock, Texas 78681
1-800-279-4007

www.tecowestinghouse.com