
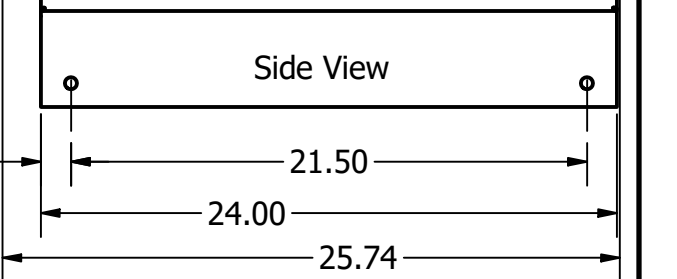


Customer Connections: L1, L2, L3, T1, T2, T3, and Ground Lug.
Wire Range- Three, 600MCM-2AWG

Note: For Torque Information See IOM Manual.
L1,L2,L3
T1,T2,T3
Suggested Area, For Customer Wire Entry And Exit Location.

HGL Enclosed Type 1 Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0600AW1S0000	30586-1S	1236
HGL0600AW1C0000	30586-1C	1250
HGL0600AW1S1*000	30586-PQ1	1238
HGL0600AW1C1*000	30586-PQ	1252

*= Communication Options

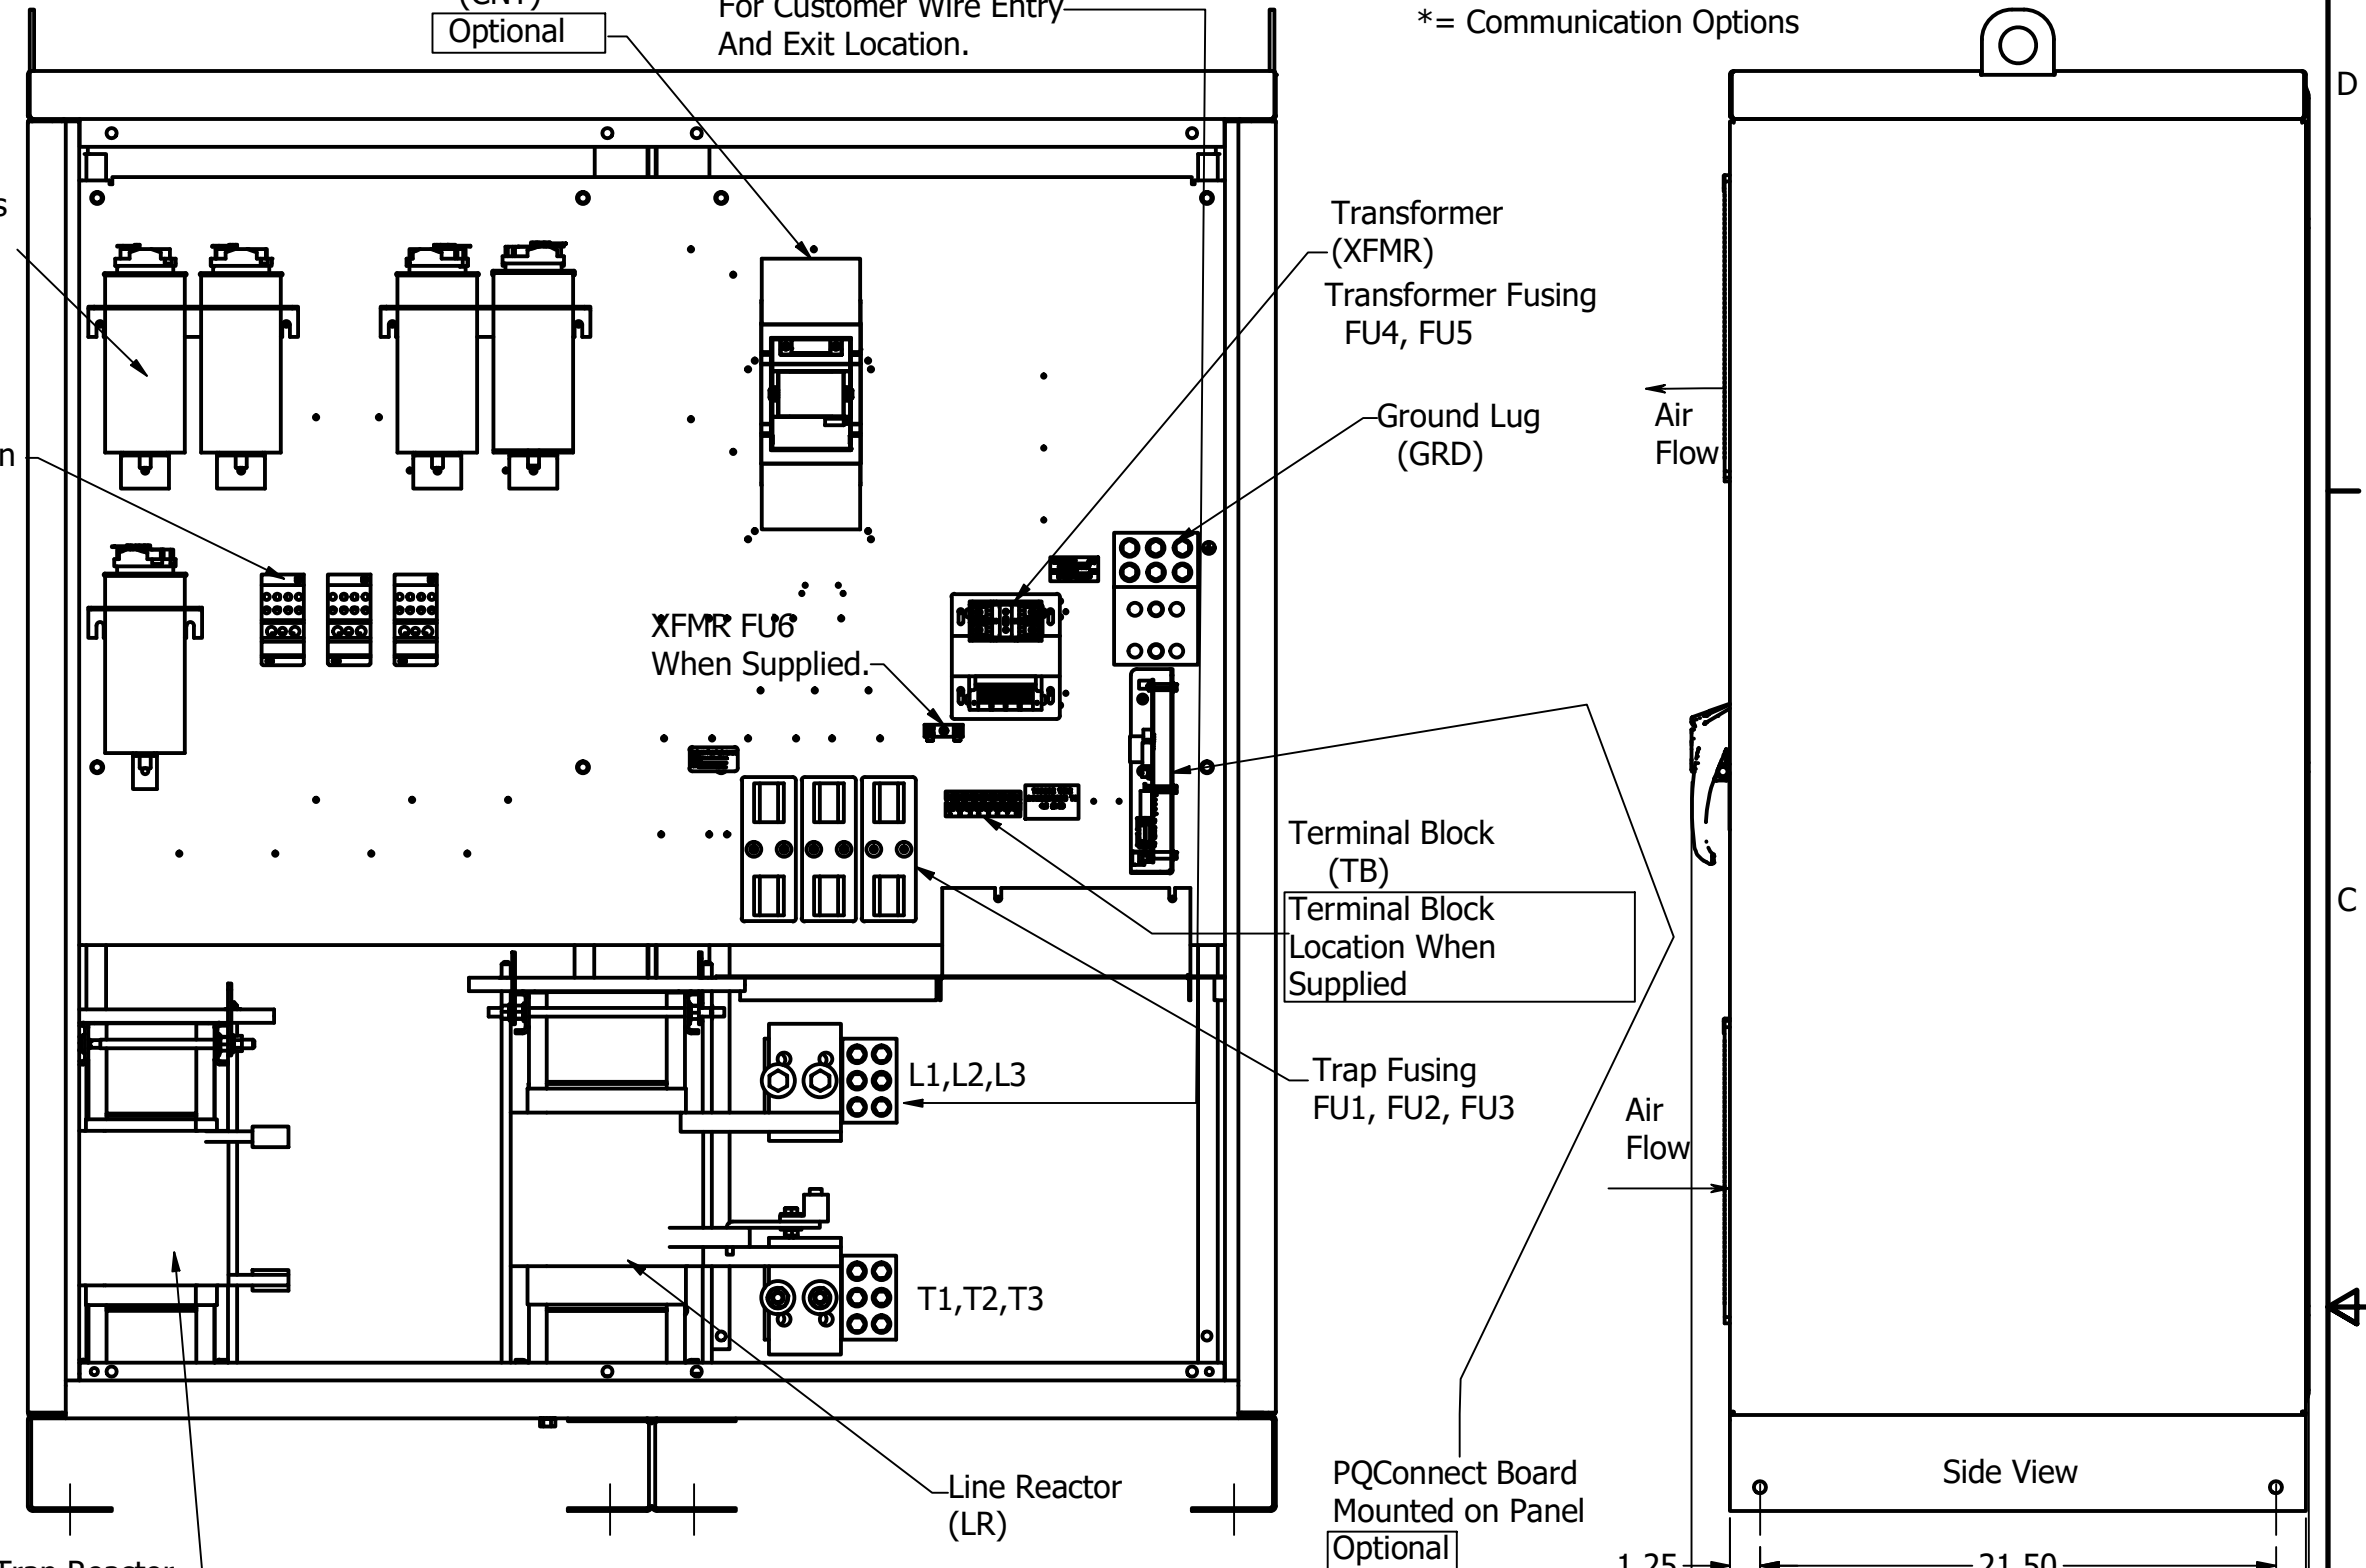

Components	HGL0600AW-----			
	1S0000	1C0000	1S*000	1C*000
Line Reactor (LR)	X	X	X	X
Trap Reactor (TR)	X	X	X	X
Capacitor (Cap)	X	X	X	X
Trap Fusing, FU1, FU2, FU3	X	X	X	X
Contactor (CNT)		X		X
Transformer (XFMR)	X	X	X	X
XFMR Fusing, FU4, FU5	X	X	X	X
PQConnect Board			X	X

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
D	6024 Add PQ Options	8/26/22	JTL
C	5653, GE to ABB CNT CHG.	1/10/2022	DSW
B	Add PQ Connect	3/12/19	DSW

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

W132N10611 Grant Drive
Gemantown, WI 53022
© 2022 TCI, LLC

HarmonicGuard Low Capacitance
HGL, 600HP, 480/3/60, Type 1

DRN: DSW DATE: 10/12/17 107274DG
SCALE: 1/8 APRVD: SIZE: C SHT 1 OF 1