







HGL Open Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0350CW0S0000	30807-1	484
HGL0350CW0C0000	30807	494
HGL0350CW0S1000	30807-PQ1	485
HGL0350CW0C1000	30807-PQ	495

Unit Specifications						
kVar	Harmonic	Volt	HZ.	Phase	HP	
55	5TH	600	60	3	350	

HGL Enclosed Type 1 Part Number	Schematic Drawing #	Approx Weight (LBS)
HGL0350CW1S0000	30807-1	635
HGL0350CW1C0000	30807	645
HGL0350CW1S1000	30807-PQ1	636
HGL0350CW1C1000	30807-PQ	646

Note: For Torque Information See IOM Manual.

Customer Connections.
L1, L2, L3, T1, T2, T3
Wire Range: Two, 350MCM to 2AWG.

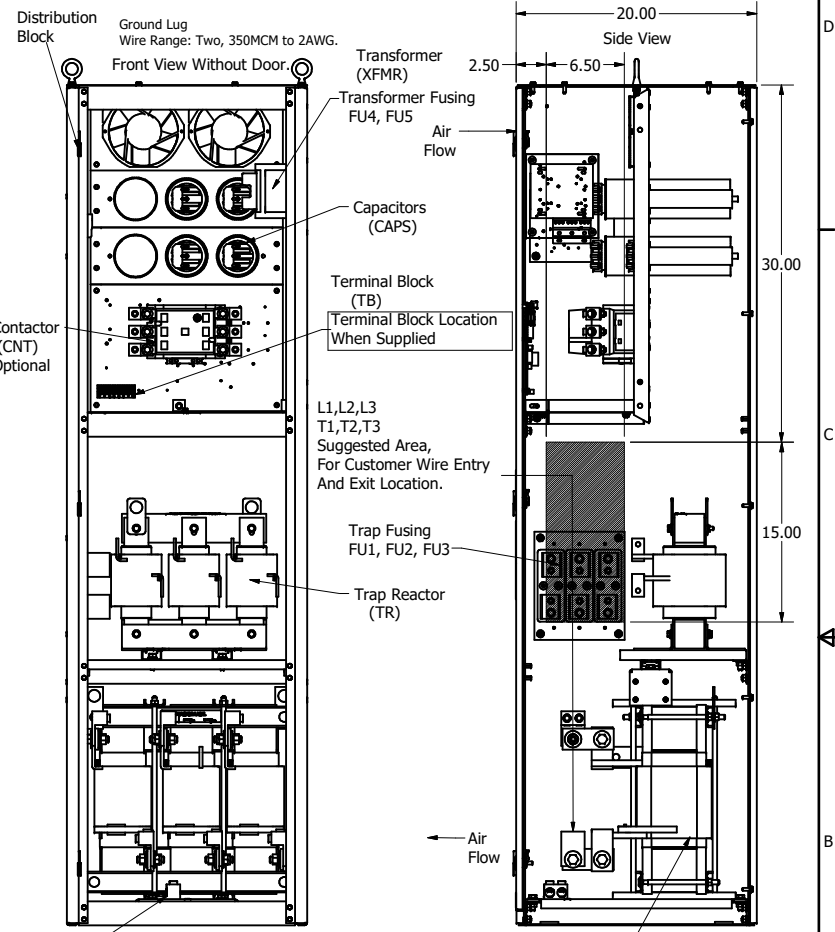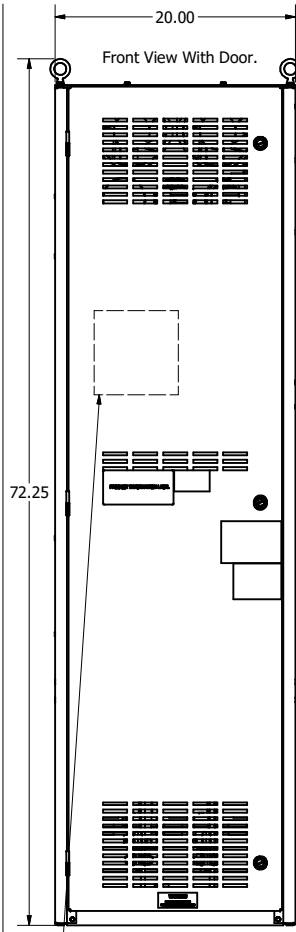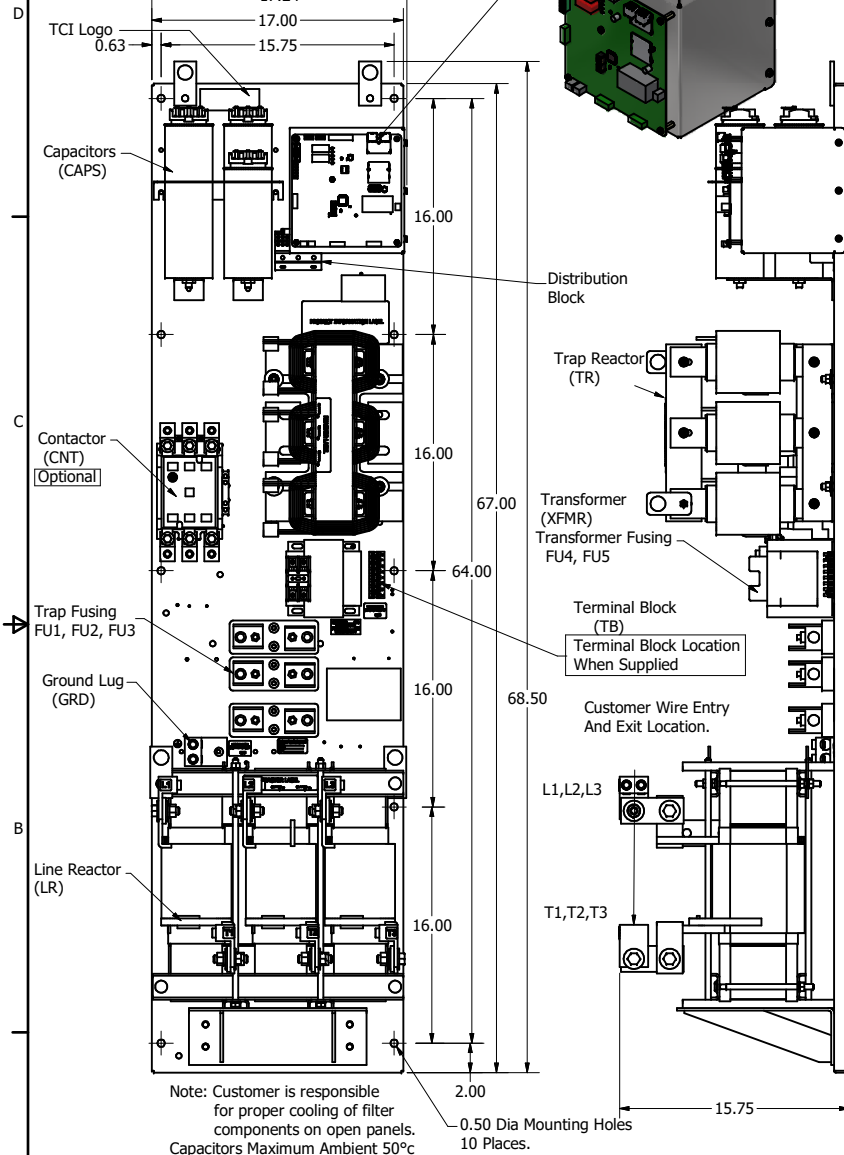

Note: Customer is responsible for proper cooling of filter components on open panels. Capacitors Maximum Ambient 50°C

HGL0350CW-----				
Components	0S0000/1S0000	0C0000/1C0000	0S1000/1S1000	0C1000/1C1000
Line Reactor (LR)	X	X	X	X
Trap Reactor (TR)	X	X	X	X
Capacitor (Cap)	X	X	X	X
Trap Fusing, FU1, FU2, FU3	X	X	X	X
Contactor (CNT)		X		X
Transformer (XFMR)	X (Type 1)	X	X	X
XFMR Fusing, FU4, FU5	X (Type 1)	X	X	X
PQConnect Board			X	X

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

TOLERANCES (EXCEPT AS NOTED)				W132 N10611 Grant Drive Germantown, WI 53022	
TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/16 ANGULAR ± 1°				HarmonicGuard Low Capacitance HGL, 350HP, 600/3/60, Open and Type 1 107294DG	
B Add PQ Connect NO REVISION	4/4/19 DATE	DSW BY	10/9/17 DATE	1/8 SCALE	107294DG SHEET 1 OF 1